

Building Information Modelling for Asset Management (BIM-AM) Standards and Guidelines



Version 3.0
2022 Edition

Document Revision Tracking

Document Revision	Issue Date
Version 1.0	24 th November 2017
Version 2.0	18 th January 2019
Version 3.0	14 th September 2022

For any enquiries regarding this document, please contact bimam-support@emsd.gov.hk.

© Copyright 2022 by the Electrical and Mechanical Services Department, all rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.

Table of Contents

1.	INTRODUCTION.....	1
1.1	Overview	1
1.1.1	Goals	1
1.1.2	Previous Versions	1
1.1.3	Version 3.0.....	1
1.2	Objectives	2
1.3	Document Structure	2
2.	BIM MODELLING STANDARD	4
2.1	BIM Reference Software	4
2.2	BIM Modelling Workflow	4
2.3	BIM Template	5
2.4	BIM Model Naming Convention	6
2.5	Federation Strategy	6
2.6	Level of Information Need (LOIN)	6
2.6.1	LOD-I for BIM Models.....	6
2.6.2	LOD-I for BIM Objects	7
2.7	BIM File Size	7
2.7.1	BIM Object File Size	7
2.7.2	BIM Model File Size	7
3.	BIM OBJECT AUTHORIZING.....	8
3.1	BIM Object Naming Convention	8
3.2	BIM Object Authoring	8
3.3	LOD-G Requirements	8
3.4	LOD-I Requirements	8
3.4.1	Classification Properties	9
3.4.2	Asset Data Template (ADT)	9
4.	BIM MODEL AUTHORIZING	10
4.1	BIM Model Set Up.....	10
4.1.1	Units and Symbols	10
4.1.2	BIM Project Coordinates	12
4.1.3	Browser Organization	12
4.2	Disciplinary BIM Model Authoring Principles.....	13
4.2.1	BIM Settings by Category – Duct System	13
4.2.2	BIM Settings by Category – Pipe System.....	13

4.2.3	Modelling E&M Equipment and Routing.....	13
4.2.4	Best Practices on Model Settings.....	17
4.3	Schedules	18
4.3.1	Equipment Schedules.....	18
4.4	Presentation Style.....	18
4.4.1	Line Weight	18
4.4.2	E&M Object Colour.....	18
4.4.3	Requirements of Line Thickness, Line Type and Colour Coding for E&M Systems....	18
4.5	A&A Works	23
5.	ASSET CODING AND NUMBERING SYSTEM	24
5.1	E&M Asset Coding.....	24
5.2	District Code	25
5.3	Building Code	26
5.4	Block Code.....	26
5.5	Names and Codes of E&M Systems and Corresponding Routing.....	27
5.6	List of E&M Equipment Code	30
6.	ASSET INFORMATION REQUIREMENTS	31
6.1	Asset Information Management Platform (AIMP)	31
6.1.1	Creation of asset relationship (i.e. system topology) in AIMP	32
6.1.2	Creation of Level 1 System.....	32
6.1.3	Creation of File Mapping to Asset	32
6.1.4	Validation of the Asset Data	33
6.2	From Project Information Model (PIM) to Asset Information Model (AIM).....	33
6.3	BIM-AM Lite.....	34
6.4	Particular Requirements for BIM-AM System	35
6.5	Asset Information Parameters.....	35
6.5.1	Common Parameters	35
6.5.2	Equipment-specific Parameters.....	35
6.6	COBie	38
6.6.1	Introduction of COBie	38
6.6.2	COBieLite File Format	38
6.6.3	COBieLite files generated from BIM models to AIMP	39
6.6.4	COBieLite files generated from AIMP for BIM-AM operation.....	39
7.	INTERFACING / INTEGRATING BIM-AM SYSTEM WITH OTHER SYSTEMS.....	40
7.1	Interfacing with Other Systems.....	40
7.1.1	Interface by API approach	40

7.1.2	Interface by deep-linking approach.....	41
7.1.3	Interface by GWIN Approach.....	41
7.2	Integrating Mobile BIM-AM System with RFID Reader	41
7.2.1	RFID Readers.....	41
7.2.2	Provision of Passive Asset Tags and Zone Tags.....	41
7.2.3	Installation Requirement of RFID Tag and QR code.....	43
7.2.4	Coding Requirement of Asset Tags and Zone Tags.....	46
7.2.5	Zone Tag (QR Code) Record Plan.....	48
7.3	Interfacing with CCTV system/camera.....	48
8.	CDE WORKFLOW FOR BIM VENUES	49
8.1	Background	49
8.2	CDE Workflow	49
9.	HANDOVER AND ACCEPTANCE	51
9.1	Handover Roles and Responsibilities	51
9.2	Handover Procedures	51
9.3	QA/QC for Handover.....	51
9.4	Handover Package	51
9.5	Acceptance Procedures	51

List of Figures

Figure 2-1 BIM-AM Workflow on Using Different Guidelines.....	5
Figure 2-2 Project Information Attributes in Revit.....	7
Figure 4-1 BIM Model Coordinates Set up	12
Figure 4-2 Browser Organization	12
Figure 6-1 The Workflow of BIM Model for BIM-AM System	31
Figure 6-2 Asset Relationship of a CCTV System	32
Figure 6-3 Example of COBieLite XML file with EMSD Specified Attributes	39
Figure 7-1 Requirement of RFID Tag Labels.....	43
Figure 7-2 Recommended Size for QR Code Label	44
Figure 7-3 RFID Tag for VAV Box.....	45
Figure 7-4 RFID Tag for AHU (Next to the Nameplate).....	45
Figure 7-5 RFID Tag for Fire Dampers	45
Figure 7-6 RFID Tag for Control Valve Set.....	45
Figure 7-7 Zone Tag at Floor Box	46
Figure 7-8 Zone Tag at Faceplates.....	46
Figure 7-9 Paper Tag Underneath the “Use Permit” of Lift and Escalator	46
Figure 7-10 RFID Tag Next to the Bracket of Fire Extinguisher	46
Figure 8-1 Submission Workflows at Different Stages	49
Figure 8-2 Overall CDE Workflow	50

List of Tables

Table 4-1 SI Base Units	10
Table 4-2 SI Derived Units	10
Table 4-3 Prefixes for SI Base Units and SI Derived Units.....	10
Table 4-4 SI Preferred Engineering Units.....	11
Table 4-5 Duct System Settings.....	13
Table 4-6 Pipe System Settings	13
Table 4-7 Required BIM Category for E&M Routing Type.....	14
Table 4-8 BIM Category for E&M Equipment.....	14
Table 4-9 Line Weight	18
Table 4-10 Line Thickness, Line Type and Colour Coding for E&M Systems.....	19
Table 5-1 Asset Code Convention	24
Table 5-2 District Code.....	25
Table 5-3 Bock Code for Asset Coding	26
Table 5-4 Names and Codes of E&M Systems and Corresponding Routing	27

Table 6-1 Example of Asset Data Template for Primary Air Handling Unit	36
Table 6-2 Asset Attribute Requirements for E&M Equipment not on the List of EMSD Asset Templates	38
Table 7-1 EMSD BMS Point Coding Requirement.....	40
Table 7-2 Zone Tag Coding Requirement (QR Code).....	48

List of Appendices

- Appendix A – Building Code (List of existing buildings in Hong Kong and their corresponding building code).
Please noted that this Appendix is in Excel format and only illustrates the building code for the existing government facilities being maintained by EMSD. For those newly constructed venues, please liaise with EMSD for acquiring the new building code.
- Appendix B – Asset Information Requirement
- Appendix C – Asset Information Management Platform (AIMP) User Guide
- Appendix D – Shared Parameters File for EMSD BIM-AM
- Appendix E – Best Practices for BIM Modelling
- Appendix F – Codification for EMSD BIM Model Naming Convention
- Appendix G – List of Equipment and Equipment Code and Provisional Requirement of RFID tags and QR codes
- Appendix H – Templates of point definition and point mapping (for equipment status visualisation in model)
- Appendix I – Handover Package and Folder Structure
- Appendix Z – Particular Specification for BIM-AM Implementation (For EMSD internal only)

List of Abbreviations: -

For common BIM terminologies, refer to the latest CIC BIM Dictionary.

Abbreviation	Definition
A&A	Addition and Alternation
ACB	Air Circuit Breaker
ADT	Asset Data Templates
AIM	Asset Information Model
AIMP	Asset Information Management Platform
AIR	Asset Information Requirements
API	Application Programming Interface
AMS	Asset Management System
ARC	Agent Responsible Code
ArchSD	Architectural Services Department
BEP	BIM Execution Plan
BH	BIM Harmonisation Guidelines for Works Department by Development Bureau
BIM	Building Information Modelling
BIM-AM	Building Information Modelling – Asset Management
BIM-AM SG	Building Information Modelling – Asset Management Standards and Guidelines
BMS	Building Management System
CAD	Computer-Aided Design
CCeP-JM	Customer Centric e-Platform for Job Management
CCMS	Central Control and Monitoring System
CCTV	Closed-circuit Television
CCS	Corporate Computer System
CDE	Common Data Environment
CIC	Construction Industry Council
COBie	Construction Operation Building Information Exchange
COBieLite	Lightweight Extensible Markup Language (XML) format of COBie data
CRAC	Computer Room Air Conditioner
CSWP	Computer-Aided-Drafting Standard for Works Projects
DDC	Direct Digital Controller
DEVB	Development Bureau
DLP	Defect Liability Period
DSD	Drainage Services Department
E-CAS	Electronic Contract Administration System
E&M	Electrical and Mechanical
ELV	Extra Low Voltage
EPC	Electronic Product Code

Abbreviation	Definition
EMABS	Electrical Mechanical, Air-Conditioning, Building Services
EMSD	Electrical and Mechanical Services Department
EMSTF	Electrical and Mechanical Services Trading Fund
GWIN	Government Wide IoT Network
HVAC	Heating, Ventilating and Air Conditioning
iBMS	Integrated Building Management System
IFC	Industry Foundation Classes
IoT	Internet of Things
JSON	JavaScript Object Notation
LOD-G	Level of Development – Geometry
LOD-I	Level of Development – Information
LOIN	Level of Information Need
LoRA	Long Range Radio
LPWAN	low-powered wide area network
MEP	Mechanical, Electrical and Plumbing
MiMEP	Multi-trade Integrated MEP
O&M	Operation and Maintenance
PABX	Private Automatic Branch Exchange
PAU	Primary air handling unit
PIM	Project Information Model
PS	Particular Specification
QA/QC	Quality Assurance/ Quality Control
QR Code	Quick Response Code
RDCC	Regional Digital Control Center
REST	Representational State Transfer
RFID	Radio-frequency Identification
RTLS	Real Time Location System
T&C	Testing and Commissioning
UHF	Ultra High Frequency
VRV-IDU	Variable Refrigerant Volume-Indoor Unit
WDs	Works Departments under DEVB
WIP	Work in Progress
XML	eXtensible Markup Language

List of Interpretations:

For common BIM terminologies, refer to CIC BIM Dictionary.

Abbreviation	Term	Definition / Description
ADT	Asset Data Templates	All templates have been included in Appendix B of this Guide.

Abbreviation	Term	Definition / Description
		Common attributes as shown in ADT should be added as Project Parameters Specific attributes as shown in ADT should be added as Object's Parameters
	Asset relationship	This is the relationship diagram as illustrated in Figure 6-1
	Attribute	It is a piece of data describing a BIM object.
	Project CDE	The CDE location allowing contractor to upload models/ documents for EMSD review and approval
	Venue CDE	The CDE location for EMSD internal use and synchronise with other internal system like CCS, AMS, CCeP-JM, etc.
	Consultant	It includes the meaning of any appointed parties to deliver the services included in BIM-AM SG for which they have been assigned.
	Contractor	It includes the meaning of any contracted/ appointed parties to deliver the works included in BIM-AM SG for which they have been contracted
	Federated Model	A model that links distinct component models, tables, analysis and other data sources without losing their identity or integrity by being linked, such that any change to one component model will not change another component model.
	BIM Object	A building component in BIM software that can be inserted, moved and rotated into required location and orientation within models (e.g. MCB board, air diffuser, etc.).
	Level 1 System/ Equipment	The E&M systems as defined in the BIM-AM SG
	Level 2 Equipment	The crucial E&M equipment for asset management as specified in the BIM-AM SG
PT	Project Team	This team is the project execution and supervision team issuing the contract or managing Contractor to deliver the contracted works and check for the compliance and quality of works in accordance with BIM-AM SG
SBU	Strategic Business Unit	Different strategic business units in EMSD under the Electrical and Mechanical Services Trading Fund (EMSTF)

1. INTRODUCTION

1.1 Overview

The Building Information Modelling for Asset Management (BIM-AM) Standards and Guidelines (thereafter referred to as BIM-AM SG) is a summary of lifecycle information requirements of Electrical and Mechanical Services Department (EMSD). BIM-AM SG provides the BIM modelling standard, coding standard and information requirements for E&M systems, and assets from construction stage to handover for building operations for parties (thereafter referred to as Contractor) working on EMSD projects. Relevant templates have been developed based on these requirements. During design and construction stage, BIM is used as a design visualisation and coordination tool. Meanwhile, asset information should be gradually built up in the Project Information Model (PIM) so that by the end of the construction stage, the BIM model becomes an Asset Information Model (AIM) for handover to asset management. BIM-AM SG provides guidelines on what information should be included and how it is managed. It aims to provide a standard for as-built BIM and asset information at handover stage conforming to EMSD BIM-AM System.

1.1.1 Goals

BIM-AM SG aims to achieve the following goals:

- Standardise E&M systems, sub-systems and equipment coding;
- Specify the information requirement for E&M equipment to be inputted in the BIM model;
- Specify the modelling requirement, project settings, E&M settings, and presentation style; and
- BIM-AM SG is built on the guidelines defined by world-wide standards.

1.1.2 Previous Versions

Version 1.0 was published in 2017, followed by Version 2.0 published in 2019. International standards and guidelines were referenced when authoring the previous versions.

1.1.3 Version 3.0

In October 2021, Development Bureau (DEVB) promulgated BIM Harmonisation Guidelines for Works Departments Version 1.0 (thereafter referred to as BH). In accordance with DEVB's Technical Circular (TC) (Works) 8/2021, WDs should further review and update their own BIM standards and guidelines to align with BH to serve their future projects. As a response, in preparation for updating BIM-AM SG from Version 2.0 to Version 3.0, BIM-AM SG has been developed to align with BH, CIC BIM Standards - General Version 2.1 – 2021 (thereafter referred to as CIC BIM Standards), and CIC Production of BIM Object Guide – General Requirement Version 2 – 2021 (thereafter referred to as CIC BIM Object Guide).

In addition, the following standards or guidelines have been referenced:

- The latest DEVB TC (Works) – Adoption of Building Information Modelling for Capital Works Projects in Hong Kong;
- CIC BIM Standards for Mechanical, Electrical and Plumbing (Version 2 – 2021); and
- BS EN ISO 19650.

1.2 Objectives

BIM-AM SG aims to enable all parties working with EMSD to understand EMSD's BIM-AM requirements, including:

- Specify modelling requirements, project settings, E&M settings, and presentation styles;
- Standardise E&M systems, sub-systems, and equipment coding;
- Specify the information requirement for E&M equipment to be inputted in BIM models;
- Specify information exchange protocols in preparation for handover and acceptance processes;
- Prepare BIM-related information for the purpose of asset management (BIM-AM); and
- Adopt the standardised approaches in BIM Execution Plan (BEP).

1.3 Document Structure

BIM-AM SG contains the following sections:

- 1) Introduction
- 2) BIM Modelling Standard: provides preliminary guide to setting up a BIM project with EMSD BIM-AM required content.
- 3) BIM Object Authoring: sets the standard for creating objects, in accordance with the BH, the CIC BIM Object Guide's principles, and EMSD BIM-AM's requirement.
- 4) BIM Model Authoring: sets the standard for creating models, in accordance with the BH, including federation strategy and system modelling methods.
- 5) Coding and Numbering System: provides the coding principles for districts, disciplines, and assets.
- 6) Asset Information Requirements: explains how BIM models can be setup to provide asset information for future management and maintenance.
- 7) Interfacing and integrating BIM-AM System with other systems: explains how BIM Asset Management can be integrated with other systems and functions, such as RFID Readers and CCTV system, as well as the Asset Tag coding requirements for facilitating integration.

- 8) CDE Workflow: explains how BIM-AM information is integrated into EMSD's Common Data Environment (CDE).
- 9) Handover and Acceptance: states the tasks and handover materials necessary for ease of information transfer from Contractor to EMSD.

2. BIM MODELLING STANDARD

2.1 BIM Reference Software

BIM-AM SG takes Autodesk Revit and Navisworks as examples for illustration. Other software fulfilling the requirements may be used for openness. The exact version of BIM authoring software needs to be agreed by the Project Team (PT) of EMSD.

If other software platform is proposed in a project, it shall comply with:

- Industry Foundation Classes (IFC) file format v4;
- Commercially available collaborative software that provides interoperability between different software applications (e.g. Navisworks or equivalent); and
- Capability to carry and export all E&M asset information described in Section 6.

2.2 BIM Modelling Workflow

EMSD's overall BIM modelling workflow involves BIM model template creation, federation structure, BIM object authoring, BIM model authoring, and BIM model review. BIM models should be authored using BIM objects aligned with BH, and then conduct quality check reviews.

For all new projects as well as addition and alternation (A&A) projects, BIM-AM SG and Guidelines for the Handover of E&M Installation to EMSD (H/O Guide) would be included in the tender document which formed the baseline for understanding EMSD's BIM-AM requirements.


Contractor shall fulfil the minimum requirement in Section 2.3 to setup BIM project template with consideration of departmental requirements from interfacing departments (e.g. ArchSD). Section 3 and 4 of BIM-AM SG outlined the requirement of BIM objects and model authoring.

During project execution, Contractor shall refer to H/O Guide to identify handover requirements applicable to the project scope. Contractor shall then carry out its works and conduct compliance check/ self-quality check in accordance with these requirements.

Upon project completion, the PT will conduct compliance and quality check for the deliverable as submitted by Contractor. Contractor shall include all required document type including as-built BIM model & objects, O&M document & photos, COBieLite file, asset relationship and equipment attributes as mentioned in BIM-AM SG and H/O Guide. The submission would undergo EMSD's internal acceptance procedures prior to project closeout.

The BIM workflow steps are shown in Figure 2-1. Details of each workflow step are explained in subsequent sections of BIM-AM SG. This workflow (and project-specific amendments, if any) shall be clearly mentioned in BEP and agreed by Project Team (PT).

Figure 2-1 BIM-AM Workflow on Using Different Guidelines

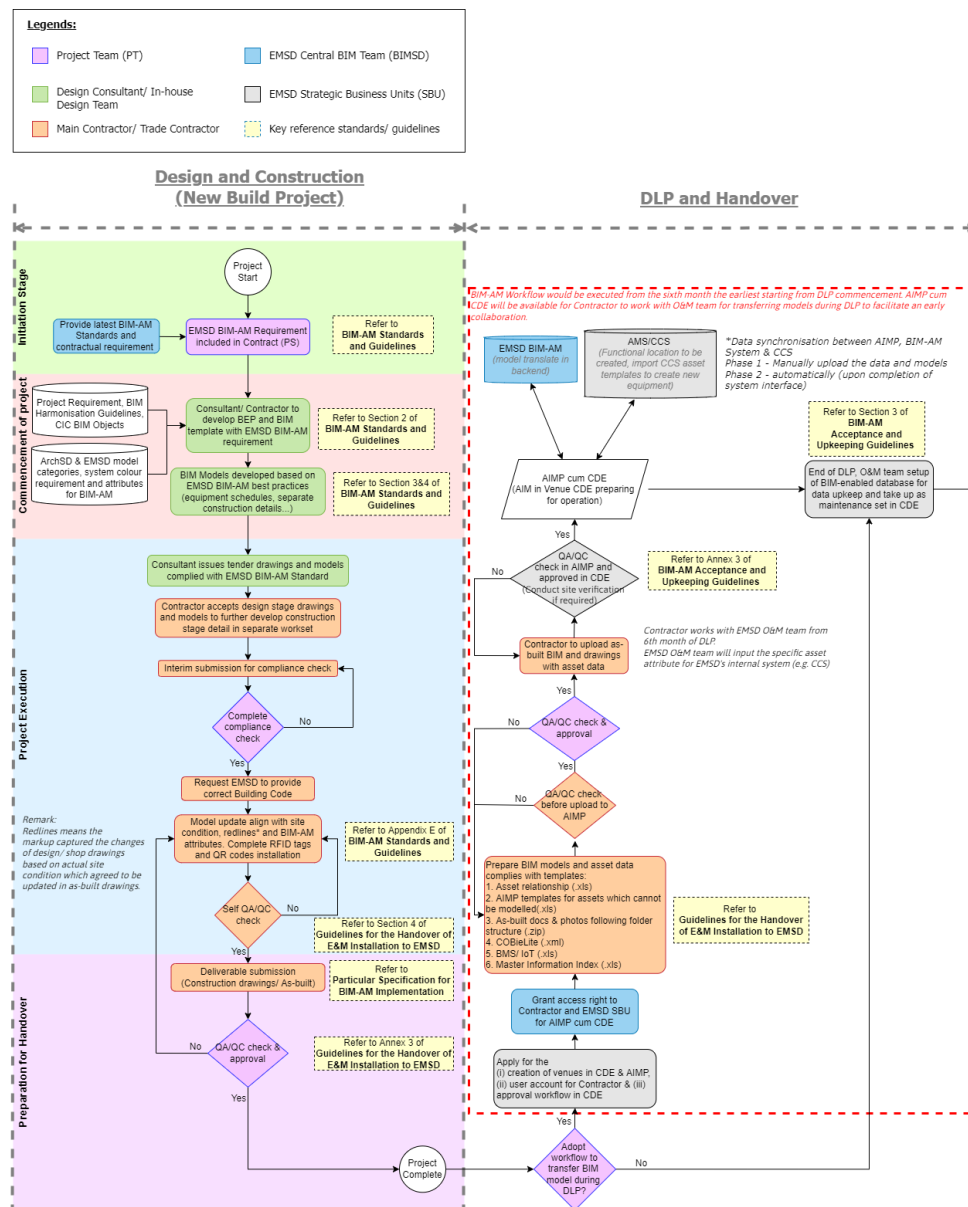

2.3 BIM Template

BIM model template shall be approved by the PT together with the submission of BEP before authoring each BIM model. BIM model templates should contain:

- Units and Symbols
- Project coordinates and base point (origin)
- Browser organisation
- Mandatory attributes (as mentioned in Section 3.4)
- E&M System and System colour as mentioned in Section 4.4.3
- Proper separation of model elements for construction details as mentioned in Section 4.2.4

2.4 BIM Model Naming Convention

BIM model naming convention shall follow BH, which has been aligned with CIC BIM Standards. Codification shall refer to Appendix F – Codification for EMSD BIM Model Naming Convention.

The requirement on this file naming convention is ONLY applicable to BIM model files to tally with the Smart City Development for 3D digital maps. However, the metadata of files shall be well defined in EMSD’s CDE prior to uploading the BIM-AM deliverables for approval.

2.5 Federation Strategy

Federation shall follow the federation principles set out in BH whilst fulfilling the following EMSD-specific requirements outlined in Appendix F:

- Federated model file shall be created to link all the architectural, structural, and E&M models for the operation of BIM-AM system. Individual models should not be bound into the federated model.
- All BIM models shall be linked with same coordinate system and same origin.
- The linked models shall be set as relative path in any combined model.
- CAD file used to produce drawing inside BIM model shall be linked with relative path and located in “CAD” folder subject to the latest version of CDE guideline.
- BIM models of different disciplines (e.g. architectural, structural, each E&M system as specified in Appendix G of this Guide) shall be separately modelled and federated.
- BIM model shall be separately constructed per individual building blocks and per floors.

2.6 Level of Information Need (LOIN)


In accordance with the principles of ISO 19650, information is required for the purpose to perform a task or support a decision. Level of information need (LOIN) is defined as the appropriate level (or “richness”) of information to be provided to satisfy the purpose of information need. LOIN could either be expressed in the richness of geometric details (LOD-G) and/or richness of datasets (LOD-I). The following sections contain further details of the requirements of LOD-G and LOD-I for BIM-AM.

EMSD’s LOD-I requirements include project information in BIM models and mandatory attributes in BIM objects.

2.6.1 LOD-I for BIM Models

For capital works projects, within BIM models, it is mandatory to input Project Information in accordance with BH. The figure below illustrates the parameters used for inputting Project Information. Refer to Appendix VI - LOD-I Requirements, Creation and Extraction of BH for details.

Figure 2-2 Project Information Attributes in Revit

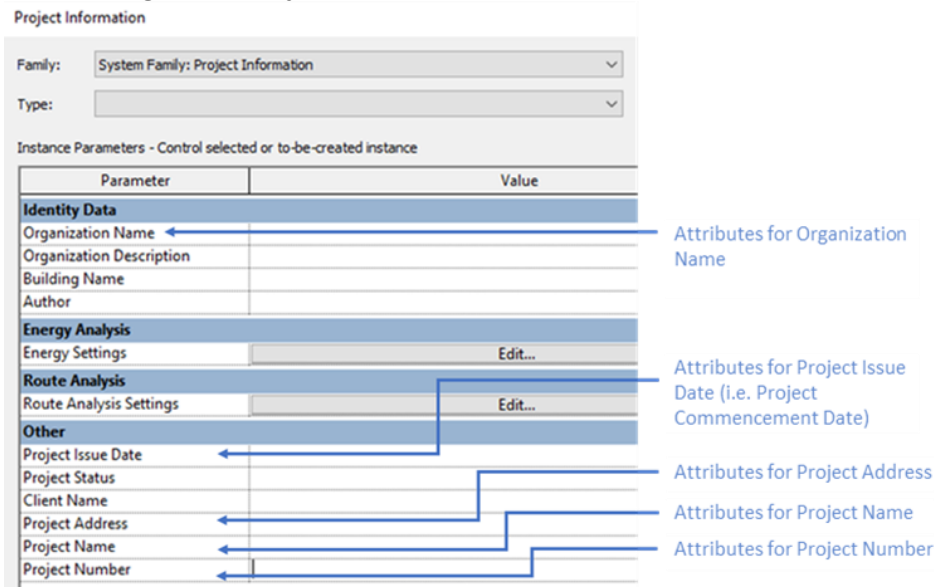

Project Information

Family: System Family: Project Information

Type:

Instance Parameters - Control selected or to-be-created instance

Parameter	Value
Identity Data	
Organization Name	
Organization Description	
Building Name	
Author	
Energy Analysis	
Energy Settings	Edit...
Route Analysis	
Route Analysis Settings	Edit...
Other	
Project Issue Date	
Project Status	
Client Name	
Project Address	
Project Name	
Project Number	

Attributes for Organization Name

Attributes for Project Issue Date (i.e. Project Commencement Date)

Attributes for Project Address

Attributes for Project Name

Attributes for Project Number

2.6.2 LOD-I for BIM Objects

For BIM objects, refer to Section 3.4 for BIM object-related LOD-I requirements in accordance with Asset Data Template (ADT).

2.7 BIM File Size

BIM file size is mentioned in BH and listed as follows for reference.

2.7.1 BIM Object File Size

The file size of each BIM object shall not exceed 5MB.

2.7.2 BIM Model File Size

The file size of each BIM model shall be kept under 500MB.

3. BIM OBJECT AUTHORIZING

3.1 BIM Object Naming Convention

BIM objects shall be modelled for a specific purpose and assigned with the most appropriate and representative category. BIM objects shall be named systematically and logically for the understanding of users and for easy BIM object management.

BIM object naming convention shall follow the principles outlined in BH. Naming codes for Category and Functional Type are managed by CIC under the CIC Master List. While the naming codes for Category and Functional Type are from three sources (CIC, DSD, and HyD), those from CIC shall be followed.

3.2 BIM Object Authoring

To maintain single source of truth, BIM objects from CIC BIM Portal should be used as far as practicable. If unavailable from CIC BIM Portal, newly created BIM objects for EMSD BIM-AM use should include the specific attributes mentioned in the EMSD Asset Data Templates (ADT) for Level 2 Equipment. Refer to Appendix B for details on EMSD ADT. Specific asset data as shown in the ADT should be created under the object parameters.

When authoring new BIM objects by altering existing objects from the CIC BIM Portal as the basis, LOD-G can be simplified or enhanced to meet the project requirement, while LOD-I should be preserved. Altered BIM object shall be renamed after the Originator.

It is encouraged to submit newly developed BIM objects to the CIC BIM Portal. For the BIM object requirement, including the object sheets format, shall be referred to the CIC BIM Object Guide for detailed requirements.

LOD-G and LOD-I requirements are as below.

3.3 LOD-G Requirements

To minimise file size, the object should be kept as light as possible, given that it fulfils the project's LOD-G requirement. Reference materials and unused components shall be purged prior to submission. For the purpose of asset management, the LOD-G for E&M equipment should be no less than LOD-G 300. Best practices on adding construction details within objects should follow principles set out in Section 2.2 and Section 4 of Appendix E.

The modelling of nested objects, which are comprised of several BIM objects, should be minimised as far as practicable. All necessary nested objects should follow principles set out in Section 2.1 of Appendix E.

Modelling of maintenance and clearance space should follow principles set out in Section 2.3 of Appendix E.

3.4 LOD-I Requirements

Asset data template should be used when authoring new BIM objects. LOD-I, or object attributes, should be grouped by property types, such as general information,

design properties, classification properties (e.g. OmniClass), and installation information, for efficient information retrieval. Refer to Section 6.6 and Appendix B for each E&M equipment.

3.4.1 Classification Properties

Adoption of OmniClass as classification for BIM objects shall refer to CIC BIM Object Guide. Refer to Appendix G for sample of OmniClass of EMSD Level 2 Equipment.

3.4.2 Asset Data Template (ADT)

Individual BIM object used for representing Level 1 and Level 2 Equipment in EMSD BIM-AM system should contain the specific attributes as listed in Appendix B. The adoption of ADT is excluded for those assets with (*) as shown in Appendix G.

4. BIM MODEL AUTHORIZING

4.1 BIM Model Set Up

4.1.1 Units and Symbols

The BIM model shall be modelled in metric and in consistent units. Commonly used model units are provided below. For units or symbols not listed below, Contractor is advised to propose the new units and/or symbols, with substantiation and submit the mapping table, where deemed necessary. Such newly-introduced units and/or symbols should be agreed by all parties and documented in BEP.

Table 4-1 SI Base Units

#	Name	Unit	Symbol
1	Length	Millimetre	mm
2	Mass	kilogram	kg
3	Time	second	s
4	Electric Current	Ampere	A
5	Thermodynamic Temperature	Kelvin	K
6	Luminous Intensity	candela	cd

Table 4-2 SI Derived Units

#	Name	Unit	Symbol
1	Energy	joule	J
2	Frequency	hertz	Hz
3	Force	newton	N
4	Illuminance	lux	lux
5	Pressure	Pascal	Pa
6	Power	watt	W
7	Temperature	Celsius	°C
8	Potential	volt	V
9	Resistance	ohm	Ω

The table below lists the prefixes used to denote decimal fractions and multiples of SI units and derived SI units. Compound prefixes are **not** permitted (e.g. millimicro). The prefix attaches directly to the name of a unit, and a prefix symbol attaches directly to the symbol for a unit.

Table 4-3 Prefixes for SI Base Units and SI Derived Units

#	Prefix	Symbol	Factor
1	yotta	Y	10 ²⁴
2	zetta	Z	10 ²¹
3	exa	E	10 ¹⁸
4	peta	P	10 ¹⁵
5	tera	T	10 ¹²
6	giga	G	10 ⁹

#	Prefix	Symbol	Factor
7	mega	M	10^6
8	kilo	k	10^3
9	hecto	h	10^2
10	deca	da	10^1
11	deci	d	10^{-1}
12	centi	c	10^{-2}
13	milli	m	10^{-3}
14	micro	μ	10^{-6}
15	nano	n	10^{-9}
16	pico	p	10^{-12}
17	femto	f	10^{-15}
18	atto	a	10^{-18}
19	zepto	z	10^{-21}
20	yocto	y	10^{-24}

Table 4-4 SI Preferred Engineering Units


#	Name	Unit
1	Area	m^2
2	Apparent Power	kVA
3	Calorific Value	kJ/kg
4	Compressed Air Pressure	kPa
5	Cooling Power	kW
6	Density	kg/m^3
7	Sound Power	dB
8	Ductwork Pressure	Pa
9	Electric Power	kW
10	Enthalpy Difference	kJ/kg
11	Heating Power	kW
12	Mass Flow Rate	kg/s
13	Pipework Pressure	kPa
14	Potential	V
15	Rotational Speed	Rev/min
16	Specific Heat	kJ/kg K
17	Specific Volume	m^3/kg
18	Thermal Resistance	m^2K/W
19	Velocity	m/s
20	Volume	m^3
21	Volume Flow Rate	l/s
22	Viscosity	N.s./ m^2

4.1.2 BIM Project Coordinates

BIM models shall be set up and base on true north world coordinates and elevation. Also, the project origin/base point should be set up by Contractor and further confirmed by the PT in the project. The model sharing systems among different disciplines shall be set up as follow:

- Hong Kong 1980 Grid System for the Eastings and Northings
- The location of city should be set as Hong Kong, China (Latitude: 22.2833 °; Longitude: 114.15°)
- The project shall set and reflect True North, i.e. the angles to True North.
- Elevations shall refer to Hong Kong Principal Datum (HKPD)

Figure 4-1 BIM Model Coordinates Set up

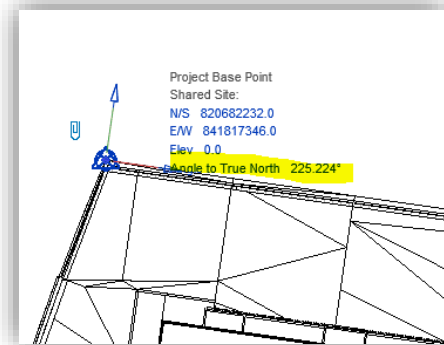


4.1.3 Browser Organization

Project Browser should be designed by Contractor so that views can be organised according to its purpose, its viewing details, and types of views. Views prepared in accordance with EMSD guidelines should be named beginning with “EMSD” to facilitate finding the correct view for import into AIMP during handover.

Below is an example of one project browser, it is organised in 3 levels:

Figure 4-2 Browser Organization

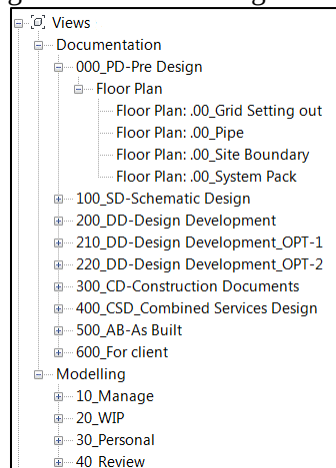

- The first level shows whether the view is used for Documentation (if any) or Modelling
- The second level shows whether the view belongs to coordination or layout, i.e. sheet views or coordination.
- The third level shows the type of the views, such as floor plan / 3D view / section views/ elevations, etc.

4.2 Disciplinary BIM Model Authoring Principles

4.2.1 BIM Settings by Category – Duct System

Duct System shall have the following settings:

Table 4-5 Duct System Settings

#	BIM Model field	Setting		Example / Symbol
1	System type name	Consists of the system code and routing code separated by a hyphen “-”		HVAC-EAD
2	System abbreviation	Input routing code in Section 5.5		EAD
3	Description	Input routing name in Section 5.5		Exhaust Air Duct
4	Rise/ drop symbol	PAD	Slash	
		EAD	Cross - Filled	
		FAD	Wye	
		SAD	Wye	
		RAD	Backslash	
		TAD	Backslash	
		SED	Cross - Filled	
5	System colour coding	Refer to Section 4.4.3 for the requirement		--

4.2.2 BIM Settings by Category – Pipe System

Pipe system shall have the following settings:

Table 4-6 Pipe System Settings

#	BIM Model field	Setting	Example / Symbol
1	System type name	Consists of the system code and routing code separated by a hyphen “-”	HVAC-CHWS
2	System abbreviation	Input routing code in Section 5.5	CHWS
3	Description	Input routing name in Section 5.5	Chilled Water Supply Pipe
4	Rise / Drop symbol	Yin Yang - Filled	 150 CHWS
5	System colour Coding	Refer to Section 4.4.3	--

4.2.3 Modelling E&M Equipment and Routing

The following objects of the E&M systems shall be modelled for the operation of BIM-AM system that includes:

- Equipment as specified in Appendix G (List of Equipment and Equipment Code and Provisional Requirement of RFID tags and QR codes) is mandatory,
- Objects of E&M systems which are visible on sight (e.g. air terminals of HVAC system, socket outlets of electrical distribution system, etc.)
- Main routing of all the systems as specified in Section 5.5. Detailed system routing including all duct or pipe accessories shall be included in HVAC system.

E&M routing and equipment should be modelled in correct BIM categories as listed below:

Table 4-7 Required BIM Category for E&M Routing Type

Routing Type	BIM Category
Trunking	Duct, if system type of trunking is not available in the BIM software
Cable Tray	Cable Tray
Duct	Duct
Pipe	Pipe

For BIM categories of E&M equipment, the following table only reveals the requirement of equipment as specified in Appendix G. Contractor shall assign the remaining unlisted equipment to an appropriate category. “Generic Models” shall not be used for BIM category.

Table 4-8 BIM Category for E&M Equipment

No.	System Name	Equipment Type	BIM Category (Under BIM authoring tools)
01	Lift and Escalator	(All)	Specialty Equipment
02	LV Switchboard	(All)	Electrical Equipment
03	Emergency Generator	(All except type below)	Electrical Equipment
		Fuel Pump	Mechanical Equipment
04	HVAC	(All except types below)	Mechanical Equipment
		Fire Dampers/ Volume Control Dampers/ Silencer	Duct Accessories
		Air Grille/ louver	Air Terminal

No.	System Name	Equipment Type	BIM Category (Under BIM authoring tools)
		Local Motor Control Panel	Electrical Equipment
		Auto-strainer	Pipe Accessories
		Valve	Pipe Accessories
05	Boiler System	(All)	Mechanical Equipment
06	Filtration Plant	(All except type blow)	Mechanical Equipment
		Local Motor Control Panel	Electrical Equipment
		Piping System	Pipes, Pipe fittings and Pipe Accessories
07	Fire Services Installation	(All except type below)	Fire Alarm Devices
		Sprinkler Control Valve Set	Pipe Accessories
		Sprinkler	Sprinkler
		Gas Suppression / Gas Cylinder Equipment	Specialty Equipment
		Fire Hydrant / Hose Reel	Plumbing Equipment
		Directional sign / Emergency lights	Lighting Fixtures
		Pump	Mechanical Equipment
08	Uninterrupted Power Supply	(All)	Electrical Equipment
09	Burglar Alarm	(All)	Security Devices
10	Radar and Navigation System	(All)	Communication Devices
11	Microwave Link System	(All)	Communication Devices
12	Timing & Display System	(All)	Communication Devices
13	Audio Video System	(All)	Communication Devices
14	Audio Electronics System	(All)	Communication Devices

No.	System Name	Equipment Type	BIM Category (Under BIM authoring tools)
15	Radio System	(All)	Communication Device
16	Closed Circuit TV System	(All)	CCTV Security Device
17	Broadcast Reception	(All)	Communication Device
18	Lighting	(All except type below)	Lighting Fixtures
		Lighting Control System	Electrical Fixtures
19	Electrical Distribution	(All except types below)	Electrical Equipment
		Busbar Trunking / Main Distribution Cable	Ducts / Cable Trays
		Isolating switch	Electrical Fixtures
		Fuse switch & Switch fuse	Electrical Fixtures
20	Medical Gas System	(All except types below)	Specialty Equipment
		Blower/ Compressor / Pump	Mechanical Equipment
21	Pneumatic Tube Transport	(All except types below)	Specialty Equipment
		Blower Unit	Mechanical Equipment
		Power Pack	Electrical Equipment
22	Internet-of-thing Installation (IoT)	(All)	Data Devices
23	High Voltage Power Supply	(All)	Electrical Equipment
24	Private Automatic Branch Exchange System	(All)	Telephone Devices
25	Automatic Refuse Collection System	(All)	Specialty Equipment

No.	System Name	Equipment Type	BIM Category (Under BIM authoring tools)
A1	Drainage	(All, except those pipes, fitting and pipe accessories and control panels)	Mechanical Equipment
		Pump Control Panel	Electrical Equipment
A2	Plumbing	(All, except those pipe, pipe fitting and accessories and control panels)	Mechanical Equipment
		Pump Control Panel	Electrical Equipment
A3	Water Leakage Detection System	(All)	Specialty Equipment
A4	Mechanical Handling & Lifting Installation	(All)	Specialty Equipment

4.2.4 Best Practices on Model Settings

Refer to Appendix E for details of the best practices on BIM object authoring, architectural BIM model authoring, E&M BIM authoring, and construction BIM details. Some key best practice categories and items are as follows:

1. Nested object is not preferable for the E&M objects having different asset information requirement as specified in the Appendix B – ADT.
2. Multi-trade Integrated MEP (MiMEP) is a trend for design and construction stage whereas the three EMSD BIM-AM standards and guidelines focused on BIM for asset management. Thus, nested object for a modular unit is not preferable for major E&M equipment from asset management perspective. Individual BIM object shall be created for each major E&M equipment in the project model as defined in Appendix G.
3. Architectural BIM models includes model setup, zone creation and modelling rooms and adding parameters.
4. E&M BIM model authoring includes browser organization, model setup and presentation style for E&M system.
5. Construction BIM details includes separate storage set (workset/ layer/ level) for construction and fabrication details.
6. BIM model upgrade.

4.3 Schedules

4.3.1 Equipment Schedules

Equipment schedules should be created in BIM models for all equipment by types showing mandatory attributes.

Equipment designation as shown in the equipment schedule shall follow field 4-7 of asset code mentioned in Section 5.1 that would benefit from design stage to operation stage with an aligned coding system.

The proposed equipment designation for AHU at ground floor would be as follows:

Example: GF-HVAC-AHU-01

4.4 Presentation Style

This Section addresses the BIM model elements display setting for 2D and 3D presentation. For 2D Computer Aided Drafting (CAD) drawings, CAD Standard for Works Projects (CSWP) for 2D CAD drawings shall be followed. If 2D drawings are generated from the BIM model, CSWP does not need to be followed if technically impracticable.

4.4.1 Line Weight

Line thicknesses to be used for 2D submittals are tabulated as follows.

Table 4-9 Line Weight

Line Weight	Line Thickness
Weight 0	0.13mm
Weight 1	0.18mm
Weight 2	0.25mm
Weight 3	0.35mm
Weight 4	0.50mm
Weight 5	0.70mm
Weight 6	1.00mm
Weight 7	2.00mm

4.4.2 E&M Object Colour

The appearance of BIM objects for asset management shall reflect the product material; otherwise, product surface colour is acceptable.

4.4.3 Requirements of Line Thickness, Line Type and Colour Coding for E&M Systems

The colour coding shall be assigned for the system types below by configuration of corresponding “Filters” under “Visibility/Graphics Override”. For system types not listed in the table below, Contractor is advised to propose new colour coding for new system types with substantiation, where deemed necessary.

Table 4-10 Line Thickness, Line Type and Colour Coding for E&M Systems

No.	System Name	Routing	Presentation (2D)		Presentation (3D)			
			Line Thickness (mm)	Line Type	Red	Green	Blue	Colour Palette
01	Lift and Escalator	Cable containment for lift and escalator	0.25	Continuous	128	0	128	
02	LV Switchboards	Cable containment for LV Switchboards	0.35	Divide2	128	128	0	
03	Emergency Generator	Cable containment for Emergency Generator	0.35	Continuous	255	0	64	
		Trunking for Emergency Generator	0.25	Continuous	0	128	255	
		Fuel Oil Return Pipe	0.25	Dashdot2	255	126	0	
		Fuel Oil Supply Pipe	0.25	Dashdot2	255	126	0	
		Fuel Oil Tank Vent Pipe	0.35	Hidden	0	128	255	
		Exhaust Air Duct	0.35	Continuous	0	255	0	
		Chimney Pipe	0.35	Continuous	0	255	0	
04	HVAC	Primary Air Duct	0.35	Continuous	0	255	255	
		Exhaust Air Duct	0.35	Continuous	0	255	0	
		Fresh Air Duct	0.35	Continuous	0	0	255	
		Supply Air Duct	0.35	Continuous	255	0	0	
		Return Air Duct	0.35	Continuous	255	0	255	
		Transfer Air Duct	0.35	Continuous	0	128	255	
		Smoke Extraction Duct	0.35	Continuous	128	128	0	
		Make Up Air Duct	0.35	Continuous	192	192	192	
		Staircase Pressurization Duct	0.35	Continuous	192	192	192	
		Pressure Relief Duct	0.35	Continuous	0	153	153	
		Chilled Water Return Pipe	0.25	Dashdot2	0	255	0	
		Chilled Water Supply Pipe	0.25	Dashdot2	0	0	255	
		Condensate Drain Pipe	0.18	Dashed2	255	128	0	
		Condensing Water Supply Pipe	0.25	Border2	0	128	64	
		Condensing Water Return Pipe	0.25	Border2	0	128	255	
		Chemical Dosing Pipe	0.25	Hidden	192	192	192	
		Make-up Water Pipe	0.25	Continuous	192	192	192	

No.	System Name	Routing	Presentation (2D)		Presentation (3D)			
			Line Thickness (mm)	Line Type	Red	Green	Blue	Colour Palette
		Heating Hot Water Supply Pipe	0.25	Phantom2	128	0	0	
		Heating Hot Water Return Pipe	0.25	Phantom2	255	128	64	
		Refrigerant Pipe	0.25	Continuous	128	0	255	
		Chimney Pipe	0.35	Continuous	0	255	0	
05	Boiler System	Hot Water Supply Pipe	0.25	Dash dot	255	0	0	
		Hot Water Return Pipe	0.25	Long Dash dot	255	128	128	
		Boiler/ Steam Pipe	0.35	Continuous	255	255	0	
		Vent Pipe	0.35	Hidden	0	128	255	
		Boiler Exhaust Pipe	0.35	Continuous	0	255	0	
		Condensate pipe (for condensate boiler)	0.18	Dashed2	255	128	0	
		Fuel Pipe	0.25	Dashdot2	255	126	0	
		Chimney Pipe	0.35	Continuous	0	255	0	
		Cold Water Pipe	0.25	Continuous	0	128	255	
06	Filtration Plant	Filtration Plant Pipe	0.25	Continuous	0	128	0	
		Return Pipe	0.25	Continuous	0	128	128	
		Overflow Pipe	0.25	Continuous	0	128	0	
		Water Supply Pipe	0.25	Continuous	0	128	255	
07	Fire Services Installation	Sprinkler Pipe	0.25	Continuous	255	0	0	
		Hose Reel/ Fire Hydrant Pipe	0.25	Continuous	255	0	0	
		Gas Suppression	0.25	Continuous	255	0	0	
		Trunking of Automatic Fire Alarm System	0.25	Divide2	255	0	0	
		Pre-action sprinkler Pipe	0.25	Continuous	255	0	0	
08	Uninterrupted Power Supply	Cable containment for Uninterrupted Power Supply	0.35	Continuous	128	64	64	
09	Burglar Alarm and Security Installation	Cable containment for Burglar Alarm and Security Installation	0.25	Continuous	128	255	255	
10	Radar and Navigation System	Cable containment for Radar and Navigation System	0.25	Continuous	0	153	0	

No.	System Name	Routing	Presentation (2D)		Presentation (3D)			
			Line Thickness (mm)	Line Type	Red	Green	Blue	Colour Palette
11	Microwave Link System	Cable containment for Microwave Link System	0.25	Continuous	0	64	64	
12	Timing & Display System	Cable containment for Timing & Display System	0.25	Continuous	128	128	128	
13	Audio Video System	Cable containment for Audio Video System	0.25	Continuous	0	128	128	
14	Audio System	Cable containment for Audio System	0.25	Continuous	102	102	51	
15	Radio System	Cable containment for Radio System	0.25	Continuous	204	153	255	
16	Closed Circuit TV System (for non-burglar alarm purpose such as CCTV at LV switch room, people control and thermal camera)	Cable containment for CCTV System	0.25	Continuous	255	153	102	
17	Broadcast Reception	Cable containment for Broadcast Reception System	0.35	Continuous	128	255	255	
18	Lighting	Cable Containment for Lighting and Lighting Control	0.35	Center2	0	255	0	
19	Electrical Distribution	Cable Containment for Low Voltage Electricity Supply – Normal	0.35	Divide2	0	255	0	
		Cable Containment for Low Voltage Electricity Supply – Emergency	0.35	Divide2	0	255	0	
		Cable Containment for High Voltage Electricity Supply	0.35	Divide2	0	255	0	
		Trunking for ELV	0.25	Continuous	0	128	255	
20	Medical Gas System	Oxygen	0.25	Continuous	255	153	0	
		Vacuum System	0.25	Long Dash Dash	255	0	255	
		Nitrous Oxide	0.25	Center	51	204	51	

No.	System Name	Routing	Presentation (2D)		Presentation (3D)			
			Line Thickness (mm)	Line Type	Red	Green	Blue	Colour Palette
		Anaesthetic Gas System	0.25	Dash	255	0	0	
		Compressor Air (4 Bar) System	0.25	Dashdot	0	0	255	
		Compressor Air (7 Bar) System	0.25	Dashdot2	0	255	255	
		Non-Medical Compressed Air System	0.25	Divide2	191	143	0	
		Vent Pipe	0.35	Hidden	0	128	255	
21	Pneumatic Tube Transport	Piping for Pneumatic Tube Transport System	0.25	Continuous	196	89	17	
22	Internet-of-thing (IoT) Installation	Cable Containment for IoT equipment	0.35	Divide2	0	255	0	
23	High Voltage Power Supply	Trunking for ELV	0.25	Continuous	0	128	255	
		Cable Containment for High Voltage Electricity Supply	0.35	Divide2	0	255	0	
		Cable Containment for High Voltage Electricity Supply	0.35	Divide2	0	255	0	
24	Private Automatic Branch Exchange System (PABX System)	Trunking for PABX System	0.25	Continuous	0	128	255	
25	Automatic Refuse Collection System	Cable Containment for Automatic Refuse Collection System	0.35	Divide2	0	255	0	
A1	Plumbing System	Cleansing Water Pipe	0.25	Dash	0	0	255	
		Cold Water Pipe	0.25	Long Dash Dash	0	0	255	
		Flushing Water Pipe	0.25	Center	255	255	0	
		Fresh Water Pipe	0.25	Continuous	0	255	0	
		Hot Water Supply Pipe	0.25	Dash dot	255	0	0	
		Hot Water Return Pipe	0.25	Long Dash dot	255	128	128	

No.	System Name	Routing	Presentation (2D)		Presentation (3D)			
			Line Thickness (mm)	Line Type	Red	Green	Blue	Colour Palette
		Irrigation Water Pipe	0.25	Dash dot dot dot	0	255	255	
		Grey Water Pipe	0.25	Continuous	0	128	255	
A2	Drainage System	Waste Pipe	0.35	Divide2	128	128	0	
		Soil and Waste Pipe	0.35	Center2	128	0	0	
		Vent Pipe	0.35	Hidden	0	128	255	
		Rainwater Pipe	0.35	Phantom2	0	255	255	
		Pumped Soil & Waste Pipe	0.35	Center2	64	0	0	
		Pumped Waste Pipe	0.35	Divide2	64	64	0	
		Pumped Rainwater Pipe	0.35	Phantom2	0	128	128	
A3	Water Leakage Detection System	Leak Detection Cable	0.35	Continuous	122	48	160	
A4	Mechanical Handling & Lifting Installation (MHL)	Cable Containment for Mechanical Handling & Lifting Installation	0.35	Divide2	125	48	255	

4.5 A&A Works

For A&A works, existing condition information or as-built information (including drawings and models) should be obtained from EMSD SBU and BIMSD. Once an A&A project has been initiated, EMSD SBU will share the latest BIM models, drawings, objects and asset data with assigned Consultant / Contractor. Consultant / Contractor should liaise with EMSD O&M team and BIMSD to acquire the trimmed model per the specific A&A area. The detail workflow of accessing data in EMSD CDE is illustrated in Section 8.

Once completed the A&A works, Contractor shall submit the final as-built BIM models, drawings, objects, O&M documents & photos, COBieLite files, asset relationship and equipment attributes as mentioned in BIM-AM SG and H/O Guide.

When the previous version of BIM-AM SG were adopted in the existing building, the existing data and model outside A&A areas should be remained unchanged. Only the models and data of newly added asset under the A&A works needs to follow the latest version of this Guide. Existing BIM model elements that directly interface with new A&A works should be revised or remodelled to comply with the latest BIM-AM SG, however, the asset data of the existing elements should be remained unchanged.

5. ASSET CODING AND NUMBERING SYSTEM

Unified conventions for E&M equipment are essential for asset management during operation and maintenance stage. The naming convention sets out principles for all fields (including districts, disciplines and assets) for the implementation of EMSD's BIM-AM Systems.

5.1 E&M Asset Coding

Equipment number (i.e. "Asset Code") consists of 7 parts, it shall be in the form as shown below and separated by a hyphen "-" between fields.

Asset code consists of all 7 parts as stated below with maximum 37 characters, including hyphen. It is used for EMSD central maintenance management so that user knows the district, building, block, and level by reading the asset code.

Asset code should be inputted in the parameter named "EMSD.Common.Asset Code" in common attribute. For Building Codes, Contractor is required to enquire (i) the new code for new build projects or (ii) the coding requirement for existing venues without any unique building code as stated in Appendix A.

Table 5-1 Asset Code Convention

Requirement of Asset Coding						
1	2	3	4	5	6	7
District Code (Refer to Section 5.2)	Building Code (Refer to Section 5.3)	Block Code (Refer to Section 5.4)	Building Level	System Code/ Routing Code ^(note 3) (Refer to Section 5.5)	Equipment Code (Refer to Appendix G)	Number ^(note 1,2)
1 to 3 characters	1 to 5 characters	1 to 3 characters	1 to 4 characters	2 to 5 characters	2 to 5 characters	2 to 6 Numbers
KT – Kwun Tong	EMSDN – EMSD HQS (NEW)	NA- No Block T1- Tower 1 B1- Block 1 N- North Wing S- South Wing	B2F – Basement 2 B1F – Basement 1 GF – Ground Floor LG1F – Lower Ground Floor 1 UG1F – Upper Ground Floor 1 1F – 1 st Floor 1MF – 1 st Mezzanine Floor 2F – 2 nd Floor RF – Roof Floor	BLR – Boiler System FP – Filtration Plant ACS – Access Control System STV – Satellite TV System	AHU – Air Handling Unit FCU – Fan Coil Unit	01 02 10 99 101

Notes:

- (1) The sequence should be restarted for each type of equipment on different floor.
- (2) One leading zero should be provided for single digital equipment number, for example 01 to 09.
- (3) System code should be used for asset coding, except for equipment of ACS, BAS, CCTV, SCS, CAS, VPS, KLS, DAB and ELS of No. 09 “Burglar Alarm System” and UTV and STV of No. 17 “Broadcast Reception” in which routing code should be adopted.

Examples:

- Fan Coil Unit on first floor in EMSD Headquarter:

Asset Code:	KT-EMSDN-NA-1F-HVAC-FCU-01
-------------	----------------------------

- FS Pump on second floor in EMSD Headquarter:

Asset Code:	KT-EMSDN-NA-2F-FS-PMP-01
-------------	--------------------------

- AHU (Air Handling Unit) on first floor in EMSD Headquarter:

Asset Code:	KT-EMSDN-NA-1F-HVAC-AHU-701
-------------	-----------------------------

5.2 District Code

District Code is location-based with reference to geolocations in Hong Kong. All districts in Hong Kong and their corresponding district codes are listed as follows:

Table 5-2 District Code

District		District Code
Hong Kong Island	Central and Western	CW
	Eastern	E
	Southern	S
	Wan Chai	WC
Kowloon	Kowloon City	KC
	Kwun Tong	KT
	Sham Shui Po	SSP
	Wong Tai Sin	WTS
	Yau Tsim Mong	YTM
New Territories	Islands	I
	Kwai Tsing	KWT
	North	N
	Sai Kung	SK
	Shatin	ST
	Tai Po	TP
	Tsuen Wan	TW
	Tuen Mun	TM
	Yuen Long	YL

5.3 Building Code

The list of buildings and their building code in Hong Kong can be referred to Appendix A – Building Code (List of existing buildings in Hong Kong and their corresponding building code). Please noted that this Appendix is in Excel format and only illustrates the building code for the existing government facilities being maintained under EMSTF. For those newly constructed venues and any discrepancies of existing building codes found in Appendix A, please liaise with EMSD for acquiring the new building codes.

5.4 Block Code

The coding below represents the blocks or towers of a development with multiple buildings. Other coding used in a project should be agreed by all parties and documented in BEP.

Table 5-3 Bock Code for Asset Coding

Block	Code
Administration Building	AB
Ancillary Block	AC
Building	BD
Staff Quarters	DQ
Footbridge	FB
Market	MK
Office	OF
Playground	PG
Subway	SB
Car Park	CAP
Management Office Building	MB
Service Block	SV
Toilet	TL
Visitor Centre	VC
Tower 1	T1
Tower 2	T2
Block 1	B1
Block 2	B2
North Wing	N
South Wing	S
West Wing	W
East Wing	E
Basement	B
Single building block in project	NA

5.5 Names and Codes of E&M Systems and Corresponding Routing

Table 5-4 Names and Codes of E&M Systems and Corresponding Routing

No.	System Name	System Code	Routing Name	Routing Code
01	Lift and Escalator	LIFT	Trunking for Lift and Escalator	LIFT
			Cable Tray for Lift and Escalator	
02	LV Switchboard	LVS	Trunking for LV Switchboards	LVS
			Cable Tray for LV Switchboards	
03	Emergency Generator	EMG	Trunking for Emergency Generator	EMG
			Cable Tray for Emergency Generator	
			Chimney for Emergency Generator	CHM
			Exhaust Air Duct for Emergency Generator	EEAD
			Fuel oil return pipe for Emergency Generator	FRP
			Fuel oil supply pipe for Emergency Generator	FSP
			Fuel oil tank vent pipe for Emergency Generator	VP
04	HVAC	HVAC	Primary Air Duct	PAD
			Exhaust Air Duct	EAD
			Fresh Air Duct	FAD
			Supply Air Duct	SAD
			Return Air Duct	RAD
			Transfer Air Duct	TAD
			Smoke Extraction Duct	SED
			Make Up Air Duct	MAD
			Staircase Pressurization Duct	SPD
			Pressure Relief Duct	PRD
			Condensate Drain Pipe	CDP
			Chilled Water Return Pipe	CHWR
			Chilled Water Supply Pipe	CHWS
			Condensing Water Supply Pipe	CDWR
			Condensing Water Return Pipe	CDWS
			Chemical Dosing Pipe	CHDP
			Make-up Water Pipe	MWP
			Heating Hot Water Supply Pipe	HHSP
			Heating Hot Water Return Pipe	HHRP
			Refrigerant Pipe	RP
			Chimney Pipe	CHP
05	Boiler System	BLR	Boiler/ Steam Pipes	BLR
			Hot Water Supply Pipe	HWSP
			Hot Water Return Pipe	HWRP
			Vent Pipe	VP
			Boiler Exhaust Pipe	BEP
			Condensate pipe (for condensate boiler)	CDP
			Fuel Pipe	FP
			Chimney Pipe	CHP

No.	System Name	System Code	Routing Name	Routing Code
			Cold Water Pipe	CWP
06	Filtration Plant	FP	Filtration Plant Pipes	FP
			Return Pipes	RP
			Overflow Pipe	OP
			Supply Pipe	SP
07	Fire Services Installation	FS	Sprinkler Pipe	SPR
			Hose Reel / Fire Hydrant Pipe	FSP
			Trunking for Automatic Fire Detection and Alarm System	AFA
			Gas Suppression System Pipe	GSS
			Pre-action sprinkler Pipe	SPR
08	Uninterrupted Power Supply	UPS	Trunking for UPS	UPS
			Cable Tray for UPS	
09	Burglar Alarm	BA	Trunking for Access Control System	ACS
			Cable Tray for Access Control System	
			Trunking for Burglar Alarm System	BAS
			Cable Tray for Burglar Alarm System	
			Trunking for CCTV and Intercom	CCTVI
			Cable Tray for CCTV and Intercom	
			Trunking for Smart Card System	SCS
			Cable Tray for Smart Card System	
			Trunking for Call Alarm System	CAS
			Cable Tray for Call Alarm System	
			Trunking for Videophone System	VPS
			Cable Tray for Videophone System	
			Trunking for Keypad Lock System	KLS
			Cable Tray for Keypad Lock System	
10	Radar and Navigation System	RNS	Trunking for Radar and Navigation System	RNS
			Cable Tray for Radar and Navigation System	
11	Microwave Link System	MLS	Trunking for Microwave Link System	MLS
			Cable Tray for Microwave Link System	
12	Timing & Display System	TDS	Trunking for Timing & Display System	TDS
			Cable Tray for Timing & Display System	
13	Audio Video System	AV	Trunking for Audio Video System	AV
			Cable Tray for Audio Video System	
14	Audio Electronics System	AUS	Trunking for Audio System	AUS
			Cable Tray for Audio System	
15	Radio System	RS	Trunking for Radio System	RS
			Cable Tray for Radio System	
16	Closed Circuit TV System	CCTV	Trunking for Closed Circuit TV System	CCTV

No.	System Name	System Code	Routing Name	Routing Code
			Cable Tray for Closed Circuit TV System	
17	Broadcast Reception	BR	Trunking for UHF TV System	UTV
			Cable Tray for UHF TV System	
			Trunking for Satellite TV System	STV
			Cable Tray for Satellite TV System	
18	Lighting	LTG	Trunking for Lighting Control	LTG
			Cable Tray for Lighting	
19	Electrical Distribution	EL	Cable Containment for Low Voltage	LV
			Cable Containment for High Voltage	HV
			Trunking for Normal Power	TR-N
			Trunking for Emergency Power	TR-E
			Trunking for ELV Systems	TR-ELV
20	Medical Gas System	MG	Oxygen	O2
			Vacuum System	MV
			Nitrous Oxide	N2O
			Anaesthetic Gas System	AGS
			Compressor Air (4 Bar) System	MA4
			Compressor Air (7 Bar) System	SA7
			Non-Medical Compressed Air System	NMA
21	Pneumatic Tube Transport	PTS	Piping for Pneumatic Tube Transport System	PTS
22	Internet-of-thing (IoT) Installation	SEN	Cable Containment for IoT equipment	SEN
23	High Voltage Power Supply	HV	Trunking for ELV	HV
			Cable Containment for High Voltage Electricity Supply	
24	Private Automatic Branch Exchange System (PABX System)	PX	Trunking for PABX System	PX
25	Automatic Refuse Collection System	ARCS	Cable Containment for Automatic Refuse Collection System	ARCS
A1	Plumbing	PL	Cleansing Water Pipe	CLWP
			Cold Water Pipe	CWP
			Flushing Water Pipe	FLWP
			Fresh Water Pipe	FWP
			Hot Water Supply Pipe	HWSP
			Hot Water Return Pipe	HWRP
			Irrigation Water Pipe	IWP
			Grey Water Pipe	GWP
A2	Drainage	DR	Waste Pipe	WP
			Soil and Waste Pipe	SWP
			Vent Pipe	VP
			Rain Water Pipe	RWP
			Pumped Soil & Waste Pipe	PSWP
			Pumped Waste Pipe	PWP
			Pumped Rainwater Pipe	PRWP

No.	System Name	System Code	Routing Name	Routing Code
A3	Water Leakage Detection System	LDS	Water Leakage Detection Cable	LDS
A4	Mechanical Handling & Lifting Installation	MHL	Cable Containment Mechanical Handling & Lifting Installation	MHL

Remarks:

- Contractor may further create other system types if any specific system is not listed above. The principle for system coding should be for easy identification and drawing production.
- The system name and coding used in a project should be agreed by all parties and documented in BEP.

5.6 List of E&M Equipment Code

Appendix G – “List of Equipment and Equipment Code and Provisional Requirement of RFID tags and QR codes” is based on the EMSD asset templates, which are designed to suit the EMSD asset management system. Thus, Appendix G does not exhaustively cover all the E&M equipment.

Contractor may further create other equipment coding if any equipment is not listed in Appendix G. The principle for equipment coding should be for easy identification and drawing production. Once new code is created, same rule as set in Section 4.3.1 applies.

The equipment and coding used in a project should be agreed by all parties and documented in BEP.


6. ASSET INFORMATION REQUIREMENTS

This section illustrates how the asset management concept are designed to enable the EMSD to maintain and manage assets. Contractor should prepare the BIM models to facilitate the BIM-AM standard workflow. With reference to Asset Information Requirement (AIR) in Appendix B, Contractor is required to input the asset information of EMSD parameters into the BIM models. The following workflow is to ensure project deliverables with good quality generated from the BIM models.

6.1 Asset Information Management Platform (AIMP)

AIMP is a web-based system developed by EMSD to manage asset information and creates corresponding asset relationship and document path for BIM-AM system. It makes use of the COBieLite to exchange information with BIM models and BIM-AM systems. It also acts as a "third party checker" on data validation, such as checking for any missing data and incorrect format of data, etc. The role of AIMP for BIM-AM system can be referred to Figure 6-1 which illustrates an overall workflow of BIM model for BIM-AM systems which is managed by EMSD. The User Guide of AIMP including the cross-system topology can be referred to Appendix C.

Figure 6-1 The Workflow of BIM Model for BIM-AM System

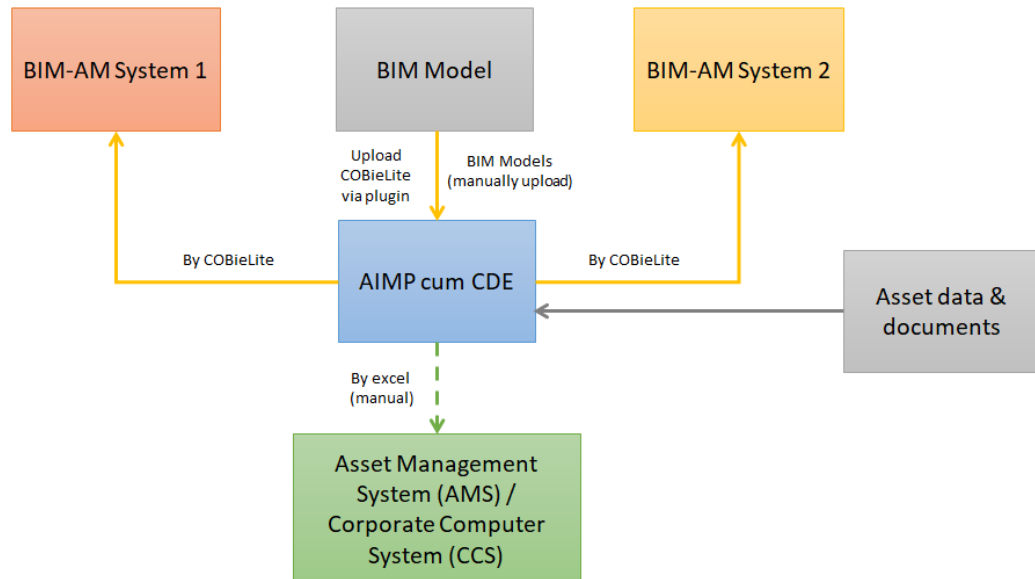


Contractor should liaise with EMSD in the sixth month (the earliest) from the start of defect liability period (DLP) to obtain login ID and passcode for the use of AIMP and they are responsible for the following tasks before the handover of as-built BIM models and document.

6.1.1 Creation of asset relationship (i.e. system topology) in AIMP

An example of asset relationship for CCTV system is illustrated in Figure 6-1. Contractor should submit topology for PT's approval. Topology showing the power supply for major E&M equipment among different E&M systems should be included and the details on topology requirement across E&M systems should be liaised with O&M teams to suit the operational needs. Topology can be simply inputted by means of excel templates (refer to the Appendix B for downloading the templates) and AIMP will automatically fill the asset data of "EMSD.Common.Asset Relationship".

Figure 6-2 Asset Relationship of a CCTV System

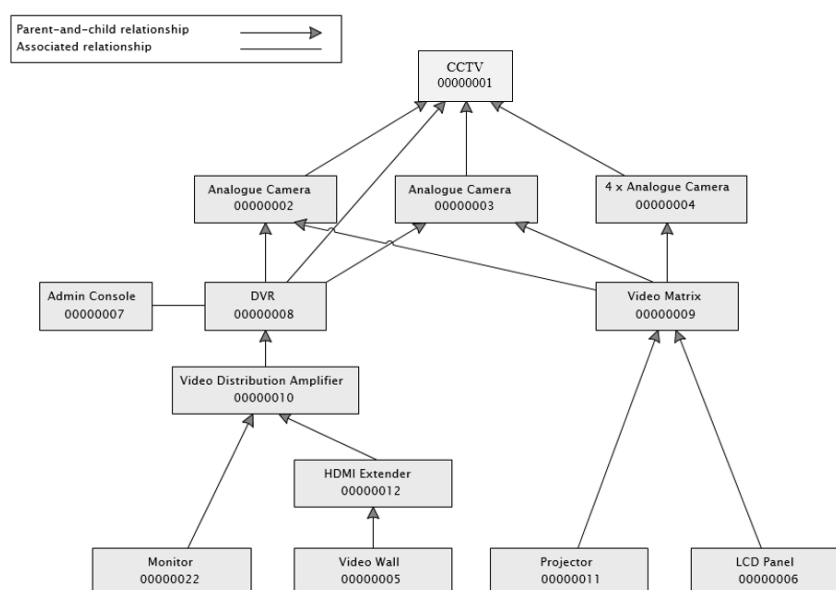

6.1.2 Creation of Level 1 System


AIMP Create "Level 1 System" as specified in Appendix G that cannot be shown in the BIM model by uploading the CCS templates to AIMP. Refer to Appendix C for downloading the CCS templates.

6.1.3 Creation of File Mapping to Asset

To facilitate the document mapping to system and asset on AIMP, all the documents shall be uploaded according to the folder structure as specified in Appendix I – Handover Package and Folder Structure, including testing and commissioning reports, catalogues, drawings, certificates, and O&M manuals, etc., under a zip file for each Level 1 System, e.g. 301 Lift & Escalator etc. AIMP will automatically assign document to asset based on the following setting:-

- Setting 1:** Documents put under "Level 1" folders, e.g. [LIFT-LIFT](#), HVAC-AS etc., will be automatically mapped to ALL the E&M equipment under that system.
- Setting 2:** Documents put under "Level 2" folders, e.g. [LIFT-ELL](#), HVAC-AHU etc., will be automatically mapped to ALL E&M equipment of the designated equipment type.

- (c) **Setting 3:** Documents put under specific asset code folder will be automatically mapped to the designated equipment.

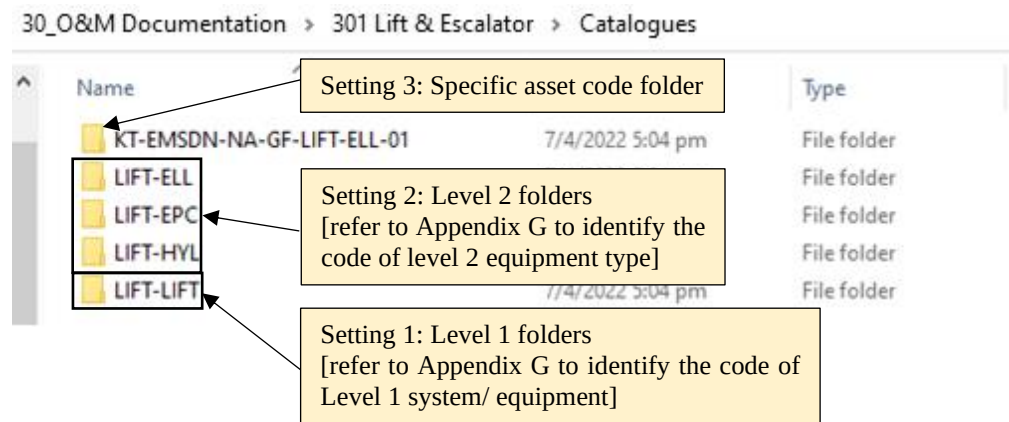

- Upon the file assignment to asset, AIMP would automatically input the data of EMSD.Common.Documentation as mentioned in the previous paragraph to corresponding Level 1 or Level 2 Equipment.

6.1.4 Validation of the Asset Data

AIMP could check the asset data input as well as the data format. All the wrong and missing data will be highlighted in red for easy reference.

6.2 From Project Information Model (PIM) to Asset Information Model (AIM)

During design and construction stage, BIM is used as a design visualisation and coordination tools. Meanwhile, asset information should be gradually built up in the BIM model so that by the end of the construction stage, the BIM model becomes an Asset Information Model (AIM) for handover to asset management.

Contractor shall work closely with PT to upload the as-built BIM model and documents to AIMP in the sixth month (the earliest) from the start of defect liability period (DLP).


EMSD has developed the departmental CDE for BIM-AM use during operation stage. The information uploaded to AIMP would be automatically stored in CDE for EMSD's approval prior to serving operations and facility management. Detailed CDE workflow is illustrated in Section 8.

Contractor shall also note that completeness and correctness of LOD-I are important for supporting asset management and shall conduct quality check to ensure the as-built information is correct before submitting to EMSD.

6.3 BIM-AM Lite

BIM-AM Lite version is an alternative way to construct as-built model with the use of 2D CAD layout as the background that has already adopted in digitalisation projects for existing buildings. With BIM-AM Lite, 2D layout was used as underlay and the required asset will be modelled with native BIM objects in order to facilitate asset data input. The BIM objects overlaid with 2D drawings which can be shown in BIM-AM platform. An example of BIM-AM Lite is shown in below figure. The adoption of BIM-AM lite is subject to the PT's confirmation.

Figure 6-3 Example of BIM-AM lite with 3D objects overlaid on 2D CAD building plan for BIM-AM operation in existing buildings

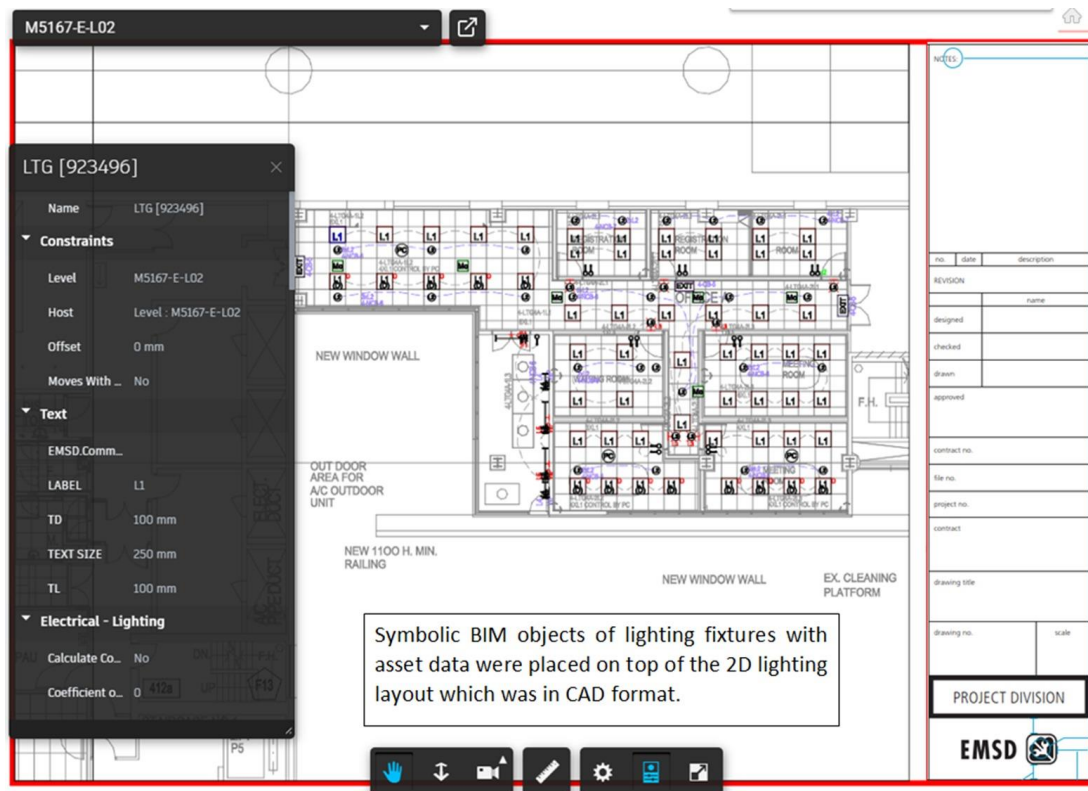

6.4 Particular Requirements for BIM-AM System

To streamline the data exchange between BIM and asset management system, the requirements as listed below shall be followed.

- The asset attributes, i.e. the EMSD shared parameter file as shown in Appendix D, shall be created as object parameters for equipment specific parameters. Other common parameters shall be created as project parameters.
- The asset attributes shall follow the AIR in Appendix B. Irrelevant parameters shall be purged before submission, for example EMSD.AV parameters shall not be shown in HVAC objects.
- Apart from the basic / technical information of the equipment, the reference link in .zip format of the documents (Drawings, O&M Manual, Catalogues, T&C Records, certificates, etc.) of all the equipment should also be inputted under the Level 1 System. The folder path of the documents under that zipped file should be inputted into the corresponding EMSD parameters of BIM objects, i.e. “EMSD.Common.Documentation” for each Level 2 Equipment. Refer to the example as shown in Table 6-1 for details.

6.5 Asset Information Parameters

The BIM Shared Parameter File of the EMSD parameters described below can be referred to Appendix D. For each equipment as listed in Appendix B, the required parameters consist of two parts:

6.5.1 Common Parameters

The attributes with naming of “EMSD.Common” are applicable to E&M equipment. Contractor is advised to propose additional attributes with substantiation for any equipment with substantiation where deemed necessary.

Shared Project Parameters with BIM Category of "Common" shall be applied to Mechanical Equipment, Electrical Equipment, Electrical Fixtures, Pipe Accessories, Duct Accessories, Specialty Equipment, Fire Alarm Devices, and Lighting Fixtures.

The Contractor shall include location information and equipment designation in “EMSD.Common.Equipment Description” for easy searching and quick identification in addition to RFID tag scanning.

6.5.2 Equipment-specific Parameters

The specific parameters of each E&M equipment shall be referred to those attributes with naming of “EMSD.LV”, “EMSD.HVAC”, “EMSD.Boiler” and so on. The details of specific parameters for each asset should be referred to Asset Information Requirement in Appendix B. Contractor should liaise with the PT of EMSD to acquire and input the correct content of the EMSD specific fields. Specific parameters should be created in objects as object parameters and no specific parameters should be present under project parameters.

For the sake of clarity, asset information requirement of all the E&M equipment and system as specified in Appendix G are explicitly demonstrated in Asset Information Requirement in Appendix B. The templates of primary air handling

unit (PAU) as shown in the table below is taken as an example to elaborate the above information requirement.

Before model submission, all irrelevant parameters (e.g. those parameters not required by EMSD) of the objects shall be deleted and unused BIM objects in the as-built BIM models shall be also purged.

Table 6-1 Example of Asset Data Template for Primary Air Handling Unit

Asset	Attributes Type	Attributes	Parameters Naming in BIM Model	Examples
PAU	Part 1: Common Parameters applicable to all equipment as specified in Section 6.6.1	Asset Code	EMSD.Common.Asset Code	KT-EMSDN-NA-1F-HVAC-PAU-701
		Functional Location	EMSD.Common.Functional Location	EMSDN-AC ^(note 1)
		Asset Relationship	EMSD.Common.Asset Relationship	To be filled using AIMP upon the upload of relationship spreadsheet
		Grouped Equipment ID	EMSD.Common.Grouped Equipment ID	To be filled using AIMP upon the grouping of asset under System Topology
		Asset Tag No	EMSD.Common.Asset Tag No.	EMSDN-0400000001
		Zone Tag No	EMSD.Common.Zone Tag No.	EMSDN-1F-000101
		Onsite Verified Date	EMSD.Common.Onsite Verified Date	01.12.2000
		Authorization Group	EMSD.Common.Authorization Group	GE00 ^(note 1)
		Division	EMSD.Common.Division	02 GESD ^(note 1)
		Equipment No	EMSD.Common.Equipment No.	19876000 ^(note 1)
		Main Work Centre	EMSD.Common.Main Work Centre	GK2A6H60 ^(note 1)
		Partner ID	EMSD.Common.Partner ID	EMSTF ^(note 1)
		Technical ID No	EMSD.Common.Technical ID No.	AHV-6-42K666A ^(note 1)
		Acquisition Value	EMSD.Common.Acquisition Value	
		CCS Equipment ID Superior	EMSD.Common.CCS Equipment ID Superior	19999999 ^(note 1)
		Customer Warranty End	EMSD.Common.Customer Warranty End	01.12.2000 ^(note 1)
		Customer Warranty Start	EMSD.Common.Customer Warranty Start	01.12.1999 ^(note 1)
		Floor	EMSD.Common.Floor	1 st Floor
		Inventory No	EMSD.Common.Inventory No.	B12345678 ^(note 1)
		Equipment Photo	EMSD.Common.Photo	Document link to be filled by AIMP upon the photo upload

Asset	Attributes Type	Attributes	Parameters Naming in BIM Model	Examples
	Part 1: Common Parameters are applicable to all equipment as specified in Section 6.5.1	Plant Section	EMSD.Common.Plant Section	01.12.1999 ^(note 1)
		Serial No	EMSD.Common.Manufacturer Serial No.	TECHID-999999
		Start-up Date	EMSD.Common.Start-up Date	02.12.2019
		Technical ID No	EMSD.Common.Technical ID No. Superior	01.12.2020
		Vendor Warranty End	EMSD.Common.Vendor Warranty End	02.12.2019
		Vendor Warranty Start	EMSD.Common.Vendor Warranty Start	01.12.2020
		Documentation	EMSD.Common.Documentation	File ID to be filled by AIMP upon the upload of zip file per folder structure as specified in Appendix I
		Catalog Profile	EMSD.Common.Catalog Profile	AC0000001
		Equipment Description	EMSD.Common.Equipment Description	1F-HVAC-AHU-001
		Planner Group	EMSD.Common.Planner Group	T00 ^(note 1)
		Construction Type	EMSD.Common.Construction Type	
		Currency	EMSD.Common.Currency	
		Manufacturer	EMSD.Common.Manufacturer	ABC Company
		Manufacturer Country	EMSD.Common.Manufacturer Country	China
		Model No	EMSD.Common.Model No.	A1234
		Weight	EMSD.Common.Weight	50kg
	Part 2: Specific Parameters for particular equipment as specified in Section 6.5.2	Equipment Location	EMSD.HVAC.Equipment Location	PAU Room 101
		First filter	EMSD.HVAC.1st Filter	Gas Filter
		Second filter	EMSD.HVAC.2nd Filter	NONE
		Equipment Type	EMSD.HVAC.Equipment Type	Primary Air Handling Unit
		Made by which company	EMSD.HVAC.Make	ABC Company
		Contain UV Sterilizing Light or not	EMSD.HVAC.UV Sterilizing Light	Y
		Contain VSD or not	EMSD.HVAC.VSD	Y
		Air Flow (l/s)	EMSD.HVAC.Air Flow	6100
		Cooling Capacity (kW)	EMSD.HVAC.Cooling Capacity	214.6
		Rated Power Input (kW)	EMSD.HVAC.Rated Power Input	30

Notes:

- 1 The data should be advised by EMSD O&M team.

Contractor shall input the following asset attributes inside the BIM model for the E&M equipment with (*) as shown in Appendix G. The table shown below are the asset attributes requirements for E&M equipment which is not on the list of EMSD Asset Templates.

Table 6-2 Asset Attribute Requirements for E&M Equipment not on the List of EMSD Asset Templates

E&M equipment not listed on EMSD asset Templates	Asset Attributes Required	Mandatory (M) / Optional (O)
E&M Equipment marked with (*) in Appendix G	EMSD.Common.Asset Code	M
	EMSD.Common.Zone Tag No.	M
	EMSD.Common.Manufacturer	O
	EMSD.Common.Model No.	O
	EMSD.Common.Equipment Description	M
	EMSD.Common.Documentation ^(note 1)	M
	EMSD.Common.Asset Relationship ^(note 1)	O

Notes:

1. Values of EMSD.Common.Documentation and EMSD.Common.Asset Relationship to be filled using asset information input tool by AIMP

6.6 COBie

This Section describes EMSD's application and requirements of COBie.

6.6.1 Introduction of COBie

COBie is an acronym for "Construction Operations Building Information exchange", which is an information exchange specification for the life-cycle capture and delivery of information needed by facility managers. It defines the way this information is structured and formats that can be used. COBie is also a format of building data for the publication of a subset of building model information and is commonly in the format of excel spreadsheet for delivering construction handover between lifecycles.

6.6.2 COBieLite File Format

COBieLite, the lightweight XML version of COBie, shall be used to export data from BIM models and import to EMSD's Asset Information Management Platform (AIMP). The COBie .xml file contains both COBie and EMSD parameters, so a parameter template in JSON format shall be adopted to eliminate the unused COBie parameters prior to exporting the COBieLite files for data exchange.

The COBie xml file exported from BIM models should contain all EMSD attributes as shown below.

Figure 6-3 Example of COBieLite XML file with EMSD Specified Attributes

```
<?xml version="1.0" encoding="UTF-8"?>
- <Facility externalSystemName="n/a" externalID="" externalEntityName=""
  xmlns:core="http://docs.buildingsmartalliance.org/nbims03/cobie/core"
  xmlns:cob="http://docs.buildingsmartalliance.org/nbims03/cobie/cobielite">
  <FacilityName>West Kowloon Government Office</FacilityName>
  <FacilityCategory>n/a</FacilityCategory>
  <FacilityDefaultMeasurementStandard>n/a</FacilityDefaultMeasurementStandard>
  <FacilityDescription xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  <FacilityDeliverablePhaseName xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
- <AssetTypes>
  - <AssetType>
    <AssetTypeName>HVAC (Air Side)-HVAC-FD</AssetTypeName>
    <AssetTypeCategory>HVAC-FD</AssetTypeCategory>
    <AssetTypeDescription>HVAC (Air Side)-HVAC-FD</AssetTypeDescription>
    <AssetTypeAccountingCategory xsi:nil="true" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  - <Assets>
    - <Asset externalSystemName="AIIT" externalID="0df70d43-e3ed-4395-b1ac-d218474e1d5a-002c41b9">
      <AssetName>YTM-WKGON-003-RM05-HVAC-FD-0002</AssetName>
      - <AssetAttributes>
        - <Attribute externalSystemName="AIIT" externalID="EDSM-ASSET-34655" propertySetName="n/a">
          <AttributeName>EMSD.Common.Weight</AttributeName>
          <AttributeCategory>Approved</AttributeCategory>
        </Attribute>
        - <Attribute externalSystemName="AIIT" externalID="EDSM-ASSET-34669" propertySetName="n/a">
          <AttributeName>EMSD.Common.Vendor Warranty Start</AttributeName>
          <AttributeCategory>Approved</AttributeCategory>
        </Attribute>
        - <Attribute externalSystemName="AIIT" externalID="EDSM-ASSET-34670" propertySetName="n/a">
          <AttributeName>EMSD.Common.Vendor Warranty End</AttributeName>
          <AttributeCategory>Approved</AttributeCategory>
        </Attribute>
      </AssetAttributes>
    </Asset>
  </Assets>
</AssetTypes>
```

6.6.3 COBieLite files generated from BIM models to AIMP

Refer to Figure 6-3, Contractor should liaise with EMSD for the installation of COBieLite Plugin and use the EMSD's plugin to export the asset data in models for generating COBieLite files per system. Definition files should be downloaded from AIMP (refer to Section 2.5.3 of H/O Guide) and loaded to plugin for the first-time use of the plugin. The COBieLite files shall be uploaded to AIMP for the creation of asset on the AIMP for the next stage of data input, including the topology and document path, etc.

6.6.4 COBieLite files generated from AIMP for BIM-AM operation

After the completion of data input on AIMP as specified in Section 6.1 in this Guide, the finalised COBieLite files with completed asset data should be exported from AIMP for BIM-AM operation. Procedures for data migration and model conversion between AIMP and two BIM-AM systems are found in H/O Guide Section 2.6.1 and 2.6.2 respectively.

7. INTERFACING / INTEGRATING BIM-AM SYSTEM WITH OTHER SYSTEMS

The requirement under this section is applicable to the project only if they are stipulated in the project requirements.

7.1 Interfacing with Other Systems

EMSD's BIM-AM system is capable to interface with other systems, including Central Control and Monitoring System (CCMS), integrated Building Management System (iBMS), Regional Digital Control Center (RDCC), Real Time Location System (RTLS), Internet-of-Things (IoT) devices, and Long Range Radio (LoRA) network.

In general, the upstream systems can provide data to BIM-AM Systems in either providing (1) application programming interface (API) for scheduled data call; (2) webpage with organised user interface with deep-linking; or (3) information exchange via Government Wide IoT Network (GWIN). Details of each approach are stated in Sections 7.1.1 to 7.1.3. Contractors shall liaise with PT on the detail requirement of the interface, including interface approach, time interval of scheduled data etc., to suit the operation and prepare the mapping table of sensor points together with associated asset by using the templates in Appendix H. Without the loss of generality, Contractors shall follow the H/O Guide and other EMSD corporate guidelines or specifications for interfacing with RDCC, iBMS, GWIN, etc.

Example of EMSD point coding requirement is shown below (Table 7-1) for reference. Contractor shall liaise with EMSD O&M team to enquire the exact requirement of point coding and assign the point codes for approval.

Table 7-1 EMSD BMS Point Coding Requirement

Field 1	Field 2	Field 3	Field 4	Field 5	
Building & Block Code	Floor Code	Equipment Code / System Code / Room Code	Equipment ID / System ID / Room ID	Function or Status Code	Function or Status ID (Optional)
<= 7 characters	<= 4 characters	<= 6 characters	2 to 4 characters	<= 6 characters	<= 2 characters

Remarks: A point abbreviation consists of 4 to 5 fields, each separated by a hyphen “-” with a maximum 35 characters.

7.1.1 Interface by API approach

For API approach, when real time system is required to be monitored / controlled directly from BIM-AM System, web services API, such as RESTful, for data exchange in XML/JSON format should be developed at the real time systems according to EMSD's iBMS and/or RDCC related standards and guidelines.

The BMS (Building Management System) connects major EMABS (Electrical Mechanical, Air-Conditioning, Building Services) systems to collect and consolidate asset operation data. BMS sensor readings shall be mapped to the associated asset codes and the data would be then visualised in models on the BIM-AM Systems which would arrange scheduled data call from EMSD corporate systems, including iBMS / RDCC, for displaying the related sensor data.

7.1.2 Interface by deep-linking approach

For deep-linking approach, the building management system shall provide a web interface with dedicated URL to show the operational status of assets and/or system. The URL should be compatible with mobile and desktop browsers in Edge, Firefox, Chrome, iOS and Android. Such simple interface with building management systems without storing historical data in the BIM-AM Systems is preferred.

7.1.3 Interface by GWIN Approach

For GWIN approach, IoT sensors shall be connected to low-powered wide area network (LPWAN) developed by EMSD, named GWIN. In this case, Contractor shall coordinate with dedicated EMSD GWIN team for installation, interfacing and testing requirement during project stage.

7.2 Integrating Mobile BIM-AM System with RFID Reader

7.2.1 RFID Readers

Only selected models of handheld UHF RFID readers with iOS and/ Android APIs would be supported by the mobile BIM-AM System. Contractor should liaise with EMSD to enquire the exact models of RFID readers supported and propose the suitable RFID readers with different coverage ranges.

7.2.2 Provision of Passive Asset Tags and Zone Tags

The RFID readers as specified in Section 7.2.1 can read the passive UHF RFID tags compatible with EPC Class 1 Gen2. Contractor shall be responsible for securely affixing the RFID tags onto major equipment which are identified by the EMSD.

Generally, major E&M equipment, such as chillers, pumps etc., as stipulated under Appendix G should be mounted with a RFID asset tag. QR codes instead of RFID tags shall be adopted for the E&M equipment with small physical size and located at sight level, such as intercom and AV player, etc.

For assets with a large number of quantity (e.g. lighting panels, cameras, loudspeakers, antennae), zone tag by means of QR code should be provided based on their spatial proximity (e.g. zone, area or room). The zone tag (i.e. the QR code) will act as the location identifier in which all the assets within the same zone shall be assigned to the same QR code. The zone tag shall be adhered to floor boxes, door frames or at faceplates which is subject to approval by PT of EMSD.

Details of tagging requirement for each “EMSD Level 2 Equipment” are illustrated in Appendix G.

Specifications of the RFID (metal large tag) and paper tags are listed in below tables:
which are also mentioned in Particular Specification for BIM-AM Implementation:

Table 7-2 Specifications of Passive RFID Metal Tag

a)	Air Interface Protocol	EPC Class 1 Gen 2; and ISO 18000-6C
b)	Device Type	Passive metal tag
c)	Operating Frequency	860MHz - 960MHz
d)	Read Range	Over 12-meter on metal surface in air space within the 902MHz - 928MHz frequency range; and Over 8-meter on non-metal surface in air space within the 902MHz - 928MHz frequency range.
e)	Memory	496 EPC bits or better; 128 bits user memory or better; and 48-bit serialized TID.
f)	Data Storage	Not less than 10 years
g)	Read/ Write Cycle	100,000 or better
h)	Operation Temperature	-20°C to +85°C or better
i)	IP Rating	IP68 compliance
j)	Size	135mm x 36mm x 9mm or smaller
k)	Material	PET / ABS
l)	Attachment	Two rivet/screw holes for mounting; Available for adhesive option.

Table 7-3

Specifications of Printable Flexible RFID Tag

a)	Air Interface Protocol	EPC Class 1 Gen 2; and ISO 18000-6C
b)	Device Type	Passive anti-metal tag
c)	Operating Frequency	902MHz - 928MHz
d)	Read Range	Over 2-meter on metal surface in air space within the 902MHz - 928MHz frequency range; and Over 2-meter on non-metal surface in air space within the 902MHz - 928MHz frequency range.
e)	Memory	128 EPC bits or better; and 512 bits user memory or better
f)	Read/ Write Cycle	100,000 or better

g)	Data Storage	Not less than 10 years
h)	Operation Temperature	-40°C to +85°C or better
i)	IP Rating	IP68 compliance
j)	Size	100mm x 25mm x 1.5mm or smaller
k)	Material	Paper / PET
l)	Attachment	Self-adhesive

7.2.3 Installation Requirement of RFID Tag and QR code

Generally, the distance between RFID tags should be provided in approximately 4m interval, and the distance between RFID readers and tags should be within 4m during operation. Thus, RFID tags are optional for the E&M equipment with bottom level higher than 6m above finished floor level. Alternatively, in some venues, contractor may choose to place the tag on the wall nearby if equipment whose bottom level is higher than 6m above. Adhesive label with RFID asset code and the associated QR code shall be adhere to the RFID tag as shown in Figure 7-1 and the size of QR code label shall not be smaller than 2.4cm x 2.4cm as shown in Figure 7-2.

Figure 7-1 Requirement of RFID Tag Labels



Figure 7-2 Recommended Size for QR Code Label



Contractor should note that the scanning performance of RFID tags depends on a number of factors, e.g. metal blockage/absorption/reflection, orientation of tag, mounting surface (e.g. metal/non-metal surface), distance between RFID reader and tags, types of RFID tag (e.g. metal tag or paper tag), size of RFID tag antenna and other site constraints (e.g. metal ceiling). Examples of RFID tag and zone tag installation are shown below (Figure 7-3 - Figure 7-10) for reference and the exact location shall be subject to approval by PT.

Figure 7-3 RFID Tag for VAV Box



Figure 7-4 RFID Tag for AHU (Next to the Nameplate)



Figure 7-5 RFID Tag for Fire Dampers



Figure 7-6 RFID Tag for Control Valve Set



Figure 7-7 Zone Tag at Floor Box



Figure 7-8 Zone Tag at Faceplates



Figure 7-9 Paper Tag Underneath the
“Use Permit” of Lift and Escalator



Figure 7-10 RFID Tag Next to the
Bracket of Fire Extinguisher



7.2.4 Coding Requirement of Asset Tags and Zone Tags

The naming convention of asset tags and zone tags as well as their mounting methodology should be proposed by Contractor for approval by the EMSD. Contractor shall follow the coding requirement as shown below. The coding of asset and zone tags shall be in the format of ASCII.

The encoding of RFID tags should tally with the compatibility of the RFID readers in the format ASCII.

Asset tag code consists of 5 parts as shown below with **maximum 16 characters**. Due to the limitation that RFID tags' encoding could only contain even numbers,

Field 5's length is subject to if Field 1 has even/ odd characters so that the total number of characters is even. For example, if Field 1 is 2 or 4 characters long, then Field 5 should be 8 characters in length; if Field 1 is 1, 3 or 5 characters long, then Field 5 should be 7 characters in length.

Table 7-4 Asset Tag Coding Requirement

Field 1	Field 2	Field 3	Field 4	Field 5
Building Code	Separator	System No.	Type of Asset Tags note 1	Sequence
1-5 characters (refer to Appendix A)	1 character	2 characters (refer Section 5.5)	1 character	7 characters (if field 1 has 1, 3, or 5 characters); or 8 characters (if field 1 has 2 or 4 characters)
e.g. EMSDN	-	01 – Lift & Escalator 02 – LV Switchboard 25 – Automatic Refuse Collection System A4 – Mechanical Handling & Lifting Installation	0 – RFID Tag 1 – QR Code	0000001 0000002 9999999

Notes:-

- Type of asset tags shall refer to the provisional requirement of asset tag in Appendix G.

Examples:

- Fan Coil Unit in EMSD Headquarter in which building code is in **ODD number**:

RFID Asset Tag Coding:	EMSDN-040 0000001
------------------------	--------------------------

- Fan Coil Unit in West Kowloon Government Office in which building code is in **EVEN number**:

RFID Asset Tag Coding:	WKGO-040 00000001 (*)
------------------------	------------------------------

* One more zero is packed to field 5 sequence.

- Intercom of Access Control System in EMSD Headquarter:

QR Code Asset Tag Coding:	EMSDN-0910000001
---------------------------	------------------

Table 7-2 Zone Tag Coding Requirement (QR Code)

Field 1	Field 2	Field 3	Field 4	Field 5
Building Code	Separator	Building Level	Separator	Sequence
1-5 characters	1 character	1-4 characters	1 character	6 characters
e.g. EMSDN	-	B2F – Basement 2 B1F – Basement 1 GF – Ground Floor LG1F – Lower Ground Floor 1 UG1F – Upper Ground Floor 1 1F – 1 st Floor 1MF – 1 st Mezzanine Floor 2F – 2 nd Floor RF – Roof Floor	-	000001 000002 ... 999999

7.2.5 Zone Tag (QR Code) Record Plan

The boundary of the zone tags and “room” or “space” covering ceiling voids and raised floor voids shall be created and clearly indicated in as-built architectural models.

7.3 Interfacing with CCTV system/camera

The interface between BIM-AM System and CCTV system / camera should be achieved by a web link of the video recorder for CCTV system / individual URL of camera via iOS and/ Android browsers. CCTV system for remote monitoring shall be provided for critical plant rooms, including chiller water pump room, chiller plant, and main LV switch room etc.

8. CDE WORKFLOW FOR BIM VENUES


8.1 Background

EMSD has developed a departmental electronic hub, i.e. CDE which is fully compliant with ISO 19650. As a single source of truth to manage models and documents submitted by Contractor. Upon project completion, EMSD would grant the access of CDE to Contractor to facilitate the submission of as-built documents before the end of DLP. AIMP is the front-end of CDE for Contractor to upload BIM-AM deliverables for EMSD comment.

8.2 CDE Workflow


The following diagram shown the submission and approval logic of different states in construction stage.

Figure 8-1 Submission Workflows at Different Stages

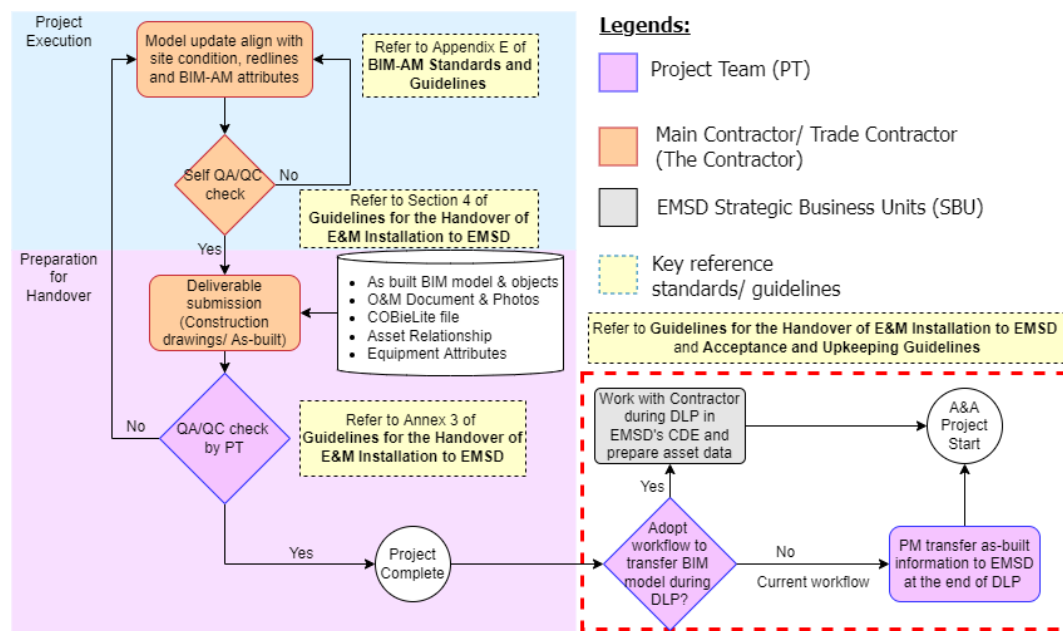

Once the as-built BIM model and data are acceptable by EMSD, the package will be uploaded to EMSD CDE by Contractor. The following diagram shown the overall workflow and change of states within EMSD's CDE named Project CDE and Venue CDE for Operation.

Figure 8-2 Overall CDE Workflow

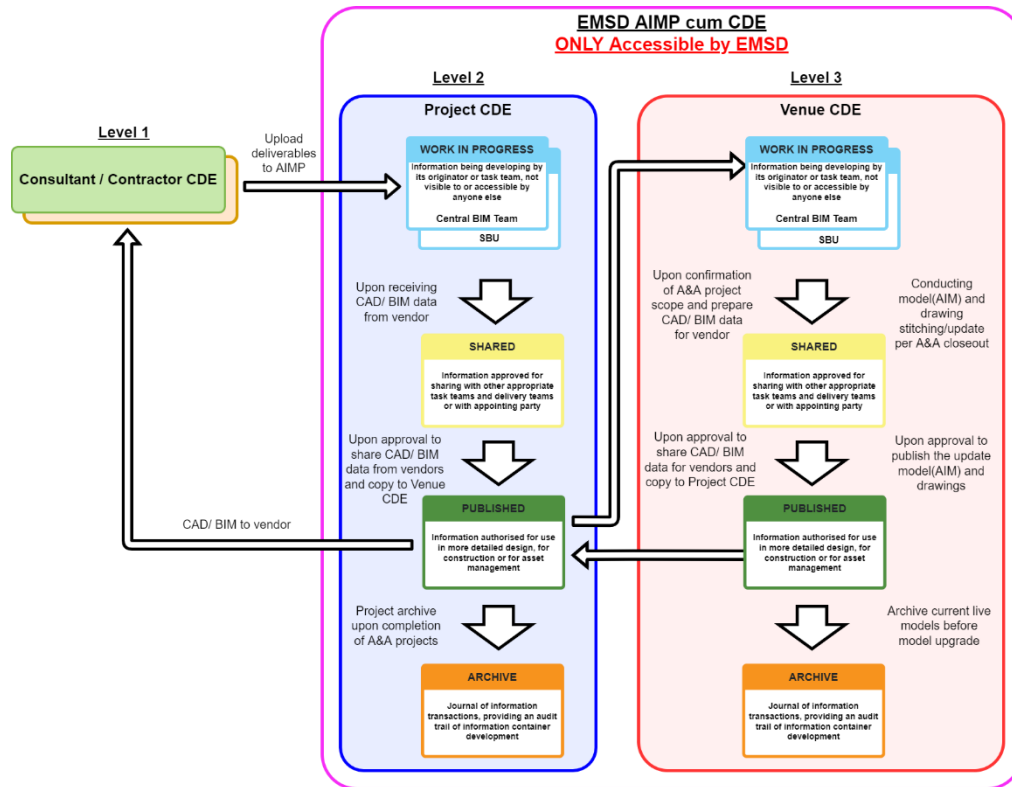

Starting from the sixth month after DLP commencement, Contractor will be able to upload the finalised as-built BIM to EMSD's AIMP for O&M Team to comment. During this period, EMSD's O&M team will work collaboratively with Contractor to complete the asset data on the AIMP. The models and data will be automatically synchronised to EMSD CDE for approval process.

Once an A&A project started, O&M team shall copy the existing model to CDE and trim down the model as per A&A scope. A set of record model with trim area will be stored in Published folder.

The A&A Contractor is required to update models based on the as-built situation of A&A works. The models and data will be reviewed by EMSD O&M team for approval to next stage.

Once the as-built models for the A&A works are accepted, the model will be combined to the existing AIM for O&M use.

9. HANDOVER AND ACCEPTANCE

This section outlines EMSD's handover and acceptance framework with reference to H/O Guide.

9.1 Handover Roles and Responsibilities

Contractor shall refer to Section 1 of H/O Guide for roles and responsibilities of personnel involved in the handover process.

9.2 Handover Procedures

Contractor shall refer to Section 2 of H/O Guide for the overall workflow and each step of the three handover stages and Section 3 for workflows and procedures specific to A&A projects.

9.3 QA/QC for Handover

Contractor shall refer to Section 4 of H/O Guide for detailed QA/QC procedures within handover stages.

9.4 Handover Package

Contractor shall follow the folder structure outlined in Appendix I and upload all the handover package onto AIMP. Refer to H/O Guide for details.

9.5 Acceptance Procedures

EMSD would conduct its internal acceptance procedures upon receiving final deliverables from Contractor during and by the end of DLP. EMSD's internal guidelines should be followed to check and accept the deliverable by Contractor.